


Pitch:1.00mm(0.039")

Single Row Pin Header Dip Type

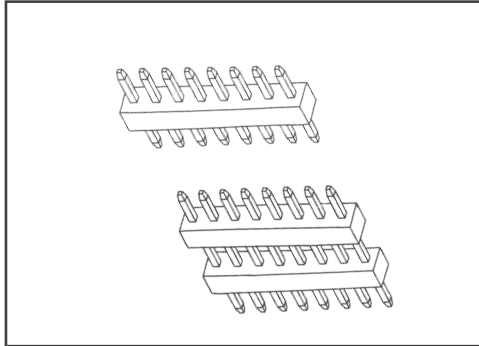


SPECIFICATIONS


Current Rating:1.0 Amps
 Insulator resistance:500 Megohms Min
 Dielectric withstanding:AC 600 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
 Insulator Material:Polyester UL 94V-0
 Nylon-6T
 Finish:Gold, Tin Or Dulex Plated

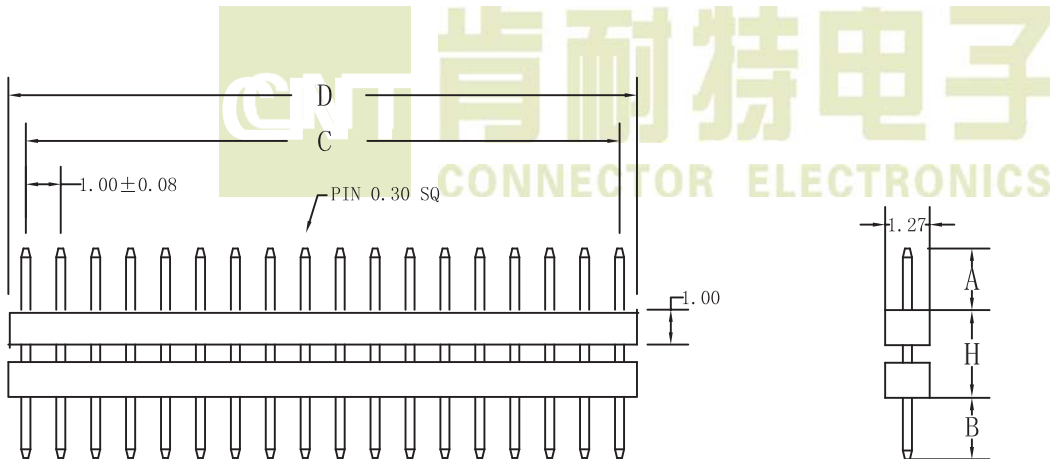

Recommended P. C. B Hole Layout



No. of Pins Per Row	04~40	
Dimension		
C	1.00*No.of Contacts-1.00	±0.15
D	1.00*No.of Contacts	±0.30

Ordering Information

M 100 1 * XX **G** **S** **A/H/B**
 M: Pitch: 1: No. of pins G: S: A/H/B
 Male 1.00mm Single Row per Row GoldPlated Straight Custom Length Available
 T: Tin Plated