


Pitch:1.00mm (0.036")

Dual Row Pin Header Straight Dip Type

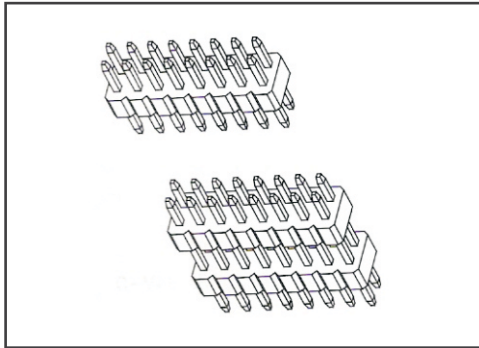


SPECIFICATIONS


Current Rating:1.0 Amps
 Insulator resistance:500 Megohms Min
 Dielectric withstanding:AC 600 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
 Insulator Material:Polyester UL 94V-0
 Nylon-6T
 Finish:Gold, Tin Or Dulex Plated

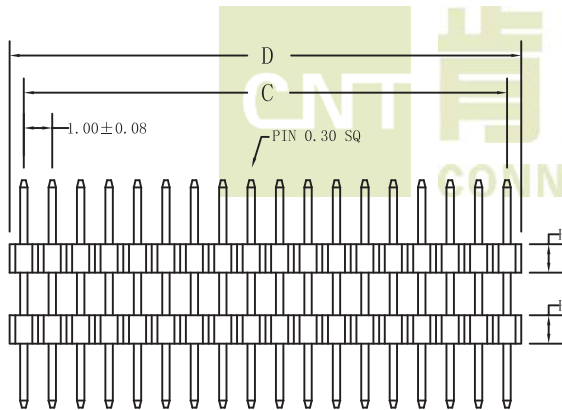

Recommended P. C. Board Hole Layout

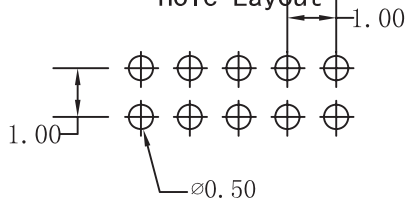

No. of Pins Per Row		03~40
Dimension		
C	1.00*No.of Contacts-1.00	±0.15
D	1.00*No.of Contacts	±0.35

Ordering Information

M 100 **2** * **XX** **G** **S** **A/E/B** **H**
 M: Pitch: 2: No. of pins per Row G: GoldPlated S: Straight Custom Length Available 1.00mm
 Male 1.00mm Double Row T: Tin Plated 1.20mm