


# Pitch:1.00mm (0.039")

## Single Row Pin Header Right Angle Dip Type


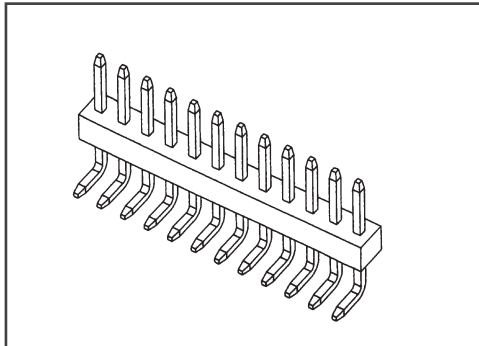


### SPECIFICATIONS


Current Rating:1.0 Amps  
 Insulator resistance:500 Megohms Min  
 Dielectric withstanding:AC 600 V  
 Contact Resistance:20 Megohms Max  
 Operating Temperature:-40° C - +105° C

### MATERIALS

Contact Material:Brass  
 Insulator Material:Polyester UL 94V-0  
 Nylon-6T  
 Finish:Gold, Tin Or Dulex Plated

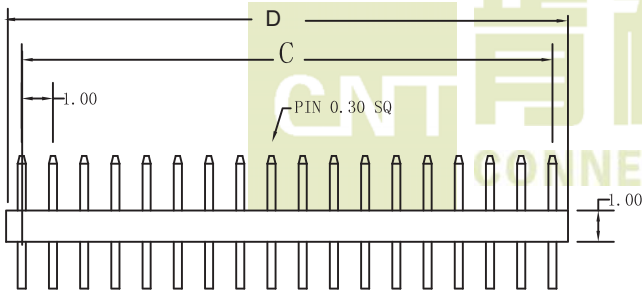

### Recommended P. C. Board Hole Layout



No. of Pins Per Row		04~40
Dimension		
C	1.00*No.of Contacts-1.00	±0.15
D	1.00*No.of Contacts	±0.30

### Ordering Information

**M 100 1 \* XX G D A/E/B**  
 M: Pitch: 1: No. of pins per Row: G: GoldPlated: D: Right Angle: A/E/B: Custom Length Available  
 Male 1.00mm Single Row: T: Tin Plated