


Pitch:1.00mm (0.036")

Dual Row Pin Header Straight Dip Type



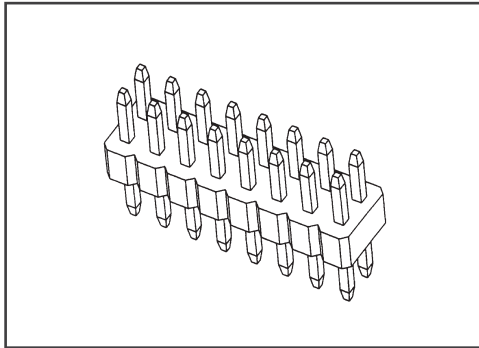


SPECIFICATIONS


Current Rating:0.5 Amps
 Insulator resistance:500 Megohms Min
 Dielectric withstanding:AC 200 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:Polyester UL 94V-0
 L C P
 Finish:Gold, Tin Or Dulex Plated

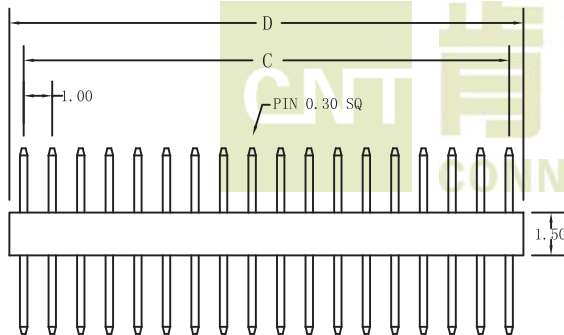

Recommended P. C. Board Hole Layout

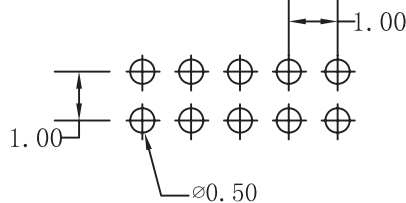

No. of Pins Per Row		05~40
Dimension		
C	1.00*No.of Contacts-1.00	±0.15
D	1.00*No.of Contacts+0.2	±0.35

Ordering Information

M 100 2 * XX G S A/B 1.5
 M: Pitch: 2: No. of pins per Row G: GoldPlated S: Straight A/B: Custom Length Available 1.5: Plastic Height
 Male 1.00mm Double Row T: Tin Plated