

REV.	LOOPS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2010.05.24	孫 元
02	Δ	變更新圖號	2010.12.14	黃明霞

Specifications

Current Rating: 1.0Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature:−40°C to +105°C





Materials

Contact Material: Phosphor Bronze

Insulator Material: Polyester UL94V−0

LCP or Equivalent material.

All materials must meet Green requirement for environment protection.

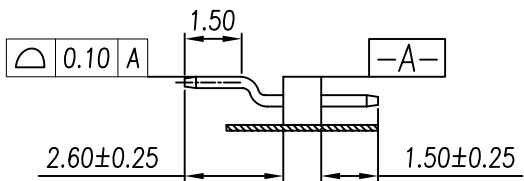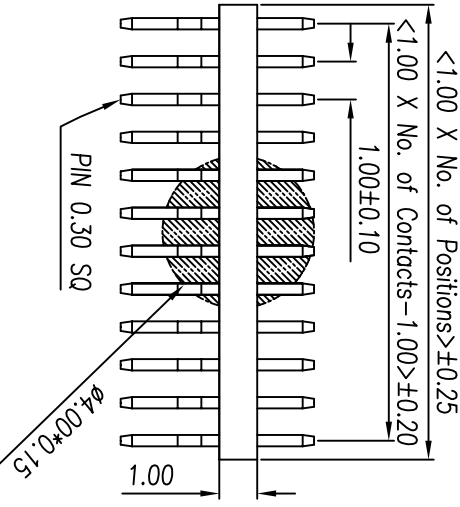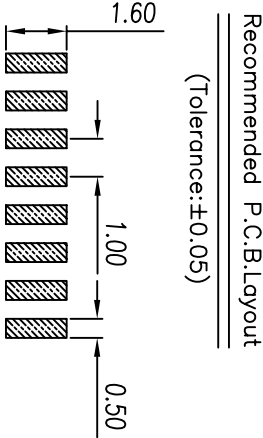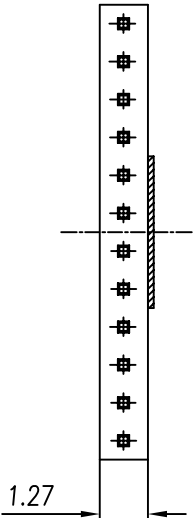

C N T 肯耐特电子有限公司

C N T 肯耐特电子有限公司				GENERAL TOLERANCE				TITLE.				
REV. 02	UNIT. mm	SCALE. 5:1	PAGE. 1/1		DESIGN: 黄明霞		DATE: 2010.12.14		DWG. NO. CD101-CA30A	1.00 MALE		
					CHECKED: 李新華		DATE: 2010.12.14				PART NO. CNT-M100-1*x-GDM-1.5/2.6/1.5	SINGLE ROW PIN
					AUDITED: LEAR		DATE: 2010.12.14					
					APPROVED: LINK		DATE: 2010.12.14					
					.XX ± 2.0°		.XX ± 0.15					
.XXX ± 1.0°		.XXX ± 0.10								SMD TYPE		