

REV	DESCRIPTION	DATE

SPECIFICATIONS

Current Rating:0.5 Amps

Insulator resistance:500 MΩ Min.

Dielectric withstanding:AC 200 V

Contact Resistance:20 mΩ Max




Operating Temperature:-40° C - +105° C

MATERIALS


Contact Material :Phosphor Bronze

Insulator Material :NYLON 9T

Finish:Gold Plated over nikle

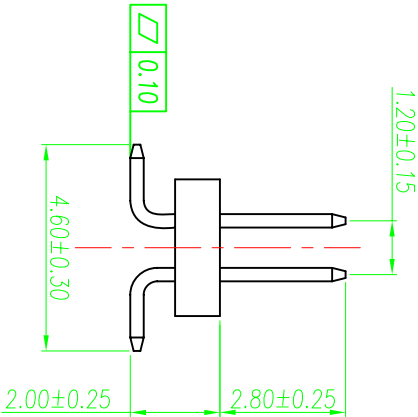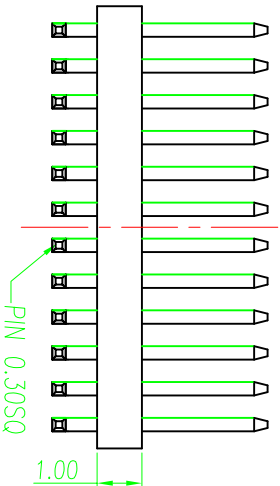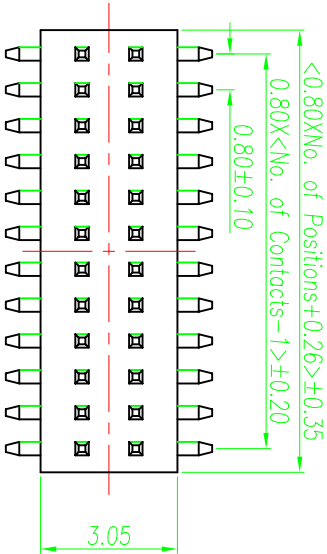

Recommended P. C. Board
Hole Layout

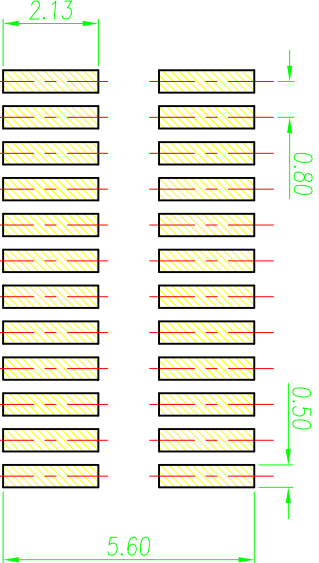

Recommended P.C.B Layout
(Tolerance:±0.05)

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
1.0	mm	1:1

GENERAL TOLERANCE			DRAWN	DATE
X.	±5°	.X	±0.38	20150820
XX.	±5°	.XX	±0.38	
XXX.	±5°	.XXX	±0.38	

DWG.IND.		TITLE
PART.IND.	CNT-M080-2*XX-GM-2.8/4.6/2	0.8mm mle headersMT Type