
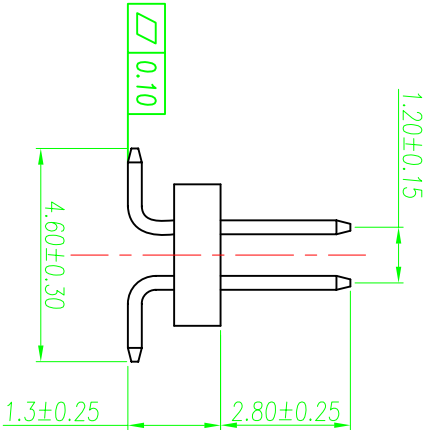
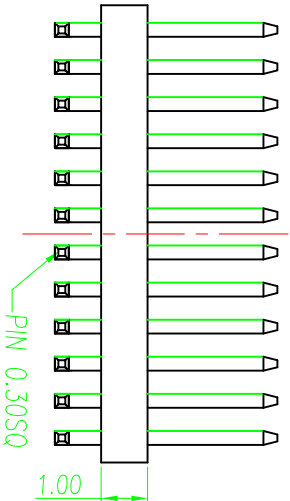


REV	DESCRIPTION	DATE


SPECIFICATIONS

Current Rating: 0.5 Amps
Insulator resistance: 500 M Ω Min.
Dielectric withstanding: AC 200 V
Contact Resistance: 20 m Ω Max
Operating Temperature: -40° C – +105° C

MATERIALS
Contact Material : Phosphor Bronze
Insulator Material: NYLON 9T
Finish: Gold Plated over nikle

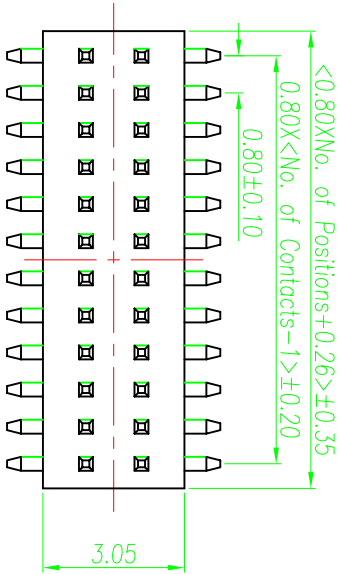

Recommended P. C. Board
Hole Layout

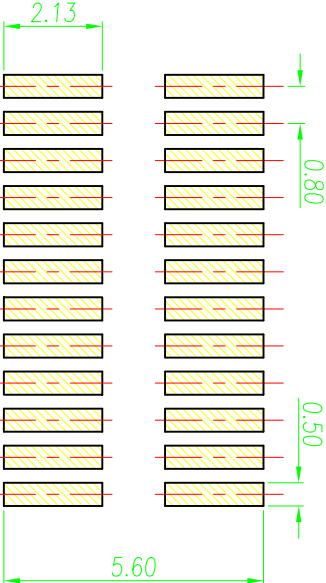

Recommended P.C.B Layout
(Tolerance: ±0.05)

GENERAL		DRAWN		DATE		DWG. NO.		TITLE	
		X. TOLERANCE	CHECK	DATE	DATE				
REV. 1.0	UNIT mm	SCALE 1:1						0.8mm male header SMT Type	
CNT 肯耐特电子有限公司		X. ±5°	X. ±0.38	APPROVE		PART NO. CNT-M080-2*XX-GM-2.8/4.6/1.3			
		XX. ±5°	XX ±0.38						
		XXX. ±5°	XXX ±0.38						