


Pitch:1.27mm (0.05")

Dual Row Pin Header S.M.T Type With Post

CNT

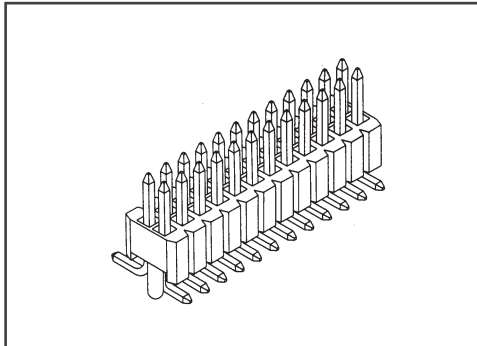

SPECIFICATIONS

Current Rating:1.0 Amps

Insulator resistance:1000 Megohms Min.

Dielectric withstanding:AC 300 V

Contact Resistance:20 Megohms Max

Operating Temperature:-40° C - +105° C




MATERIALS

Contact Material:Copper Alloy


Insulator Material:Polyester UL 94V-0

Nylon-6T

Finish:Gold/Tin Plated

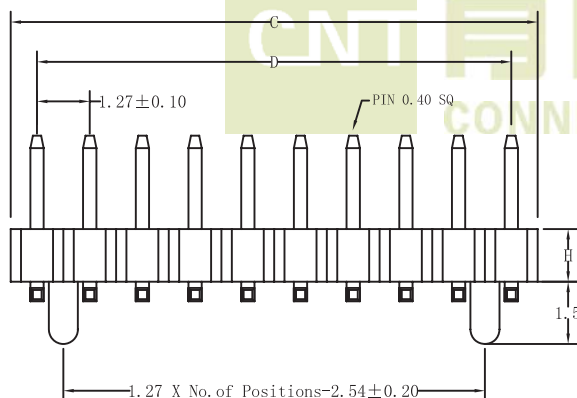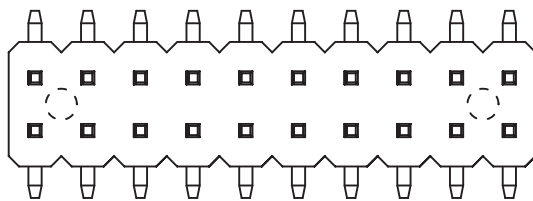

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~33
Dimension		
C	1.27*No. of Contacts	±0.38
D	1.27*No. of Contacts-1.27	±0.25

Ordering Information

M	127	2	*	XX	G	W	A/W/B	H	P
M: Male	Pitch: 1.27mm	2: Double Row		No. of pins per Row	G: GoldPlated T: Tin Plated	M:S M T	Custom Length Available	1.00MM 1.50MM 2.00MM 2.50MM	With Post