


Pitch:1.27mm (0.05")

Dual Row Pin Header S.M.T Type


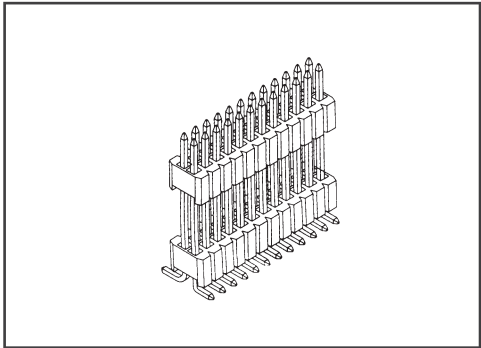


SPECIFICATIONS


Current Rating:1.0 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 300 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:Polyester UL 94V-0
 Nylon-6T
 Finish:Gold/Tin Plated

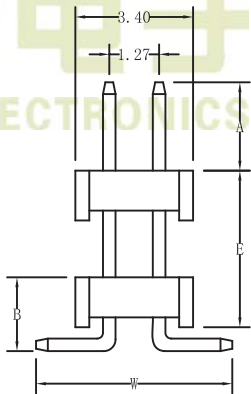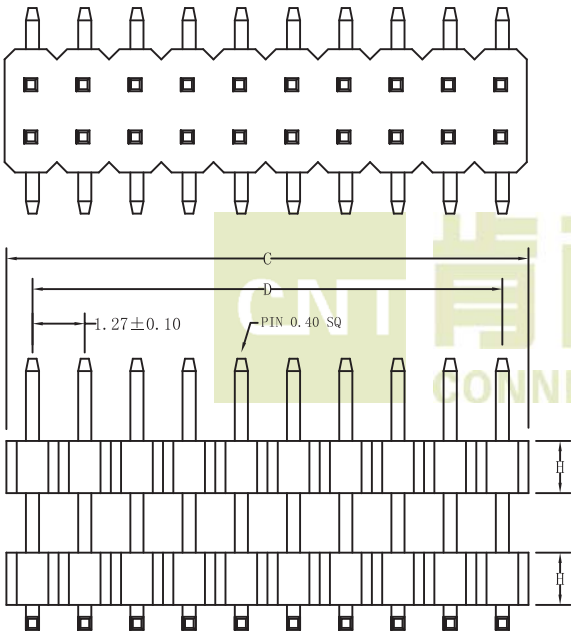

Recommended P. C. Board
 Hole Layout

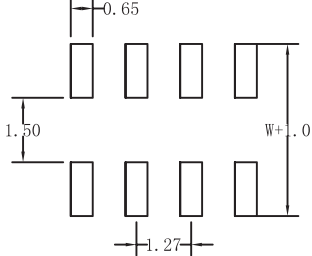

No. of Pins Per Row		02~33
Dimension		
C	1.27*No. of Contacts	±0.38
D	1.27*No. of Contacts-1.27	±0.25

Ordering Information

M	127	2	*	XX	G	M	A/E/W/B	H
M: Male	Pitch: 1.27mm	2: Double Row		No. of pins per Row	G: GoldPlated T: Tin Plated	M:S M T	Custom Length Available	1.00MM 1.50MM 2.00MM 2.50MM