


Pitch:1.27mm (0.05")

Dual Row Female Header Dip Type With Local Peg

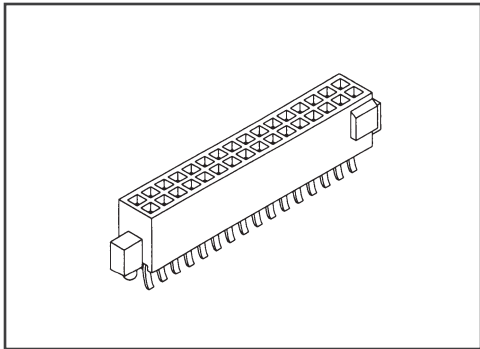


SPECIFICATIONS



Current Rating:1.0 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 300 V
Contact Resistance:20 Megohms Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:Polyester UL
94V-0Nylon-6T
Finish:Gold/Tin Plated

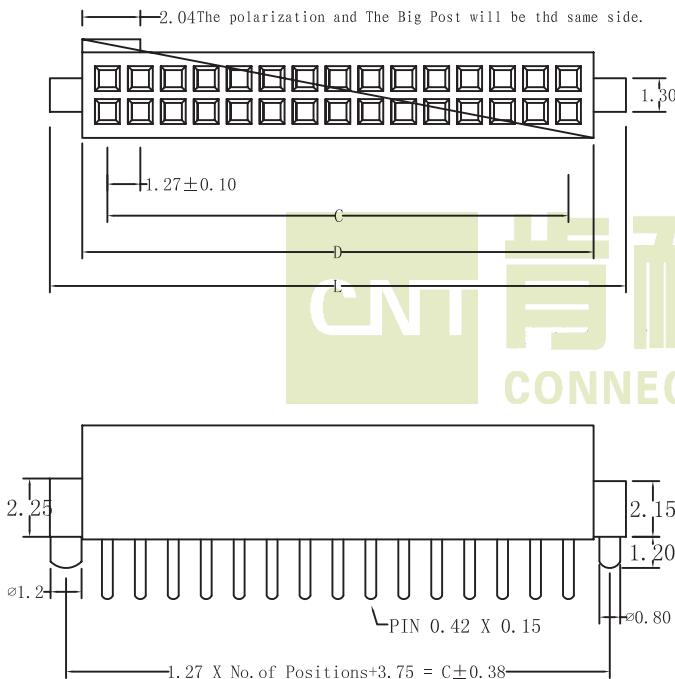

Recommended P. C. Board
Hole Layout

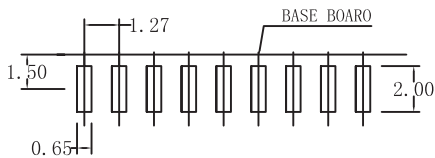

No. of Pins Per Row		04~50
Dimension		
C	1.27*No. of Contacts-1.27	±0.25
D	1.27*No. of Contacts+0.35	±0.38

Ordering Information

F **127** **2** ***** **XX** **G** **S** **F** **440** **P**
F: Female Header Pitch: 1.27mm 2: Double Row No. of pins per Row G: GoldPlated S: Straight Custom Length Available Plastic Height : 4.4mm With Post
T: Tin Plated