


Pitch:2.00mm (0.079")

Single Row Pin Header Right Angle Dip Type


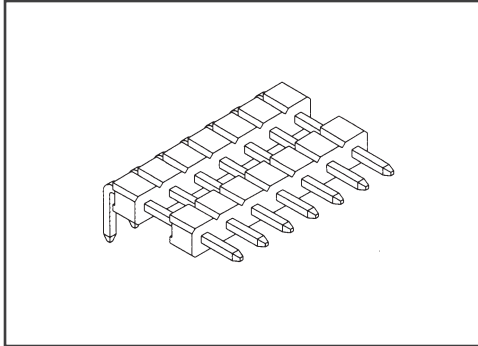


SPECIFICATIONS


Current Rating:2.0 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
 Insulator Material: NYLON-6T
 Finish:Gold/Tin Plated

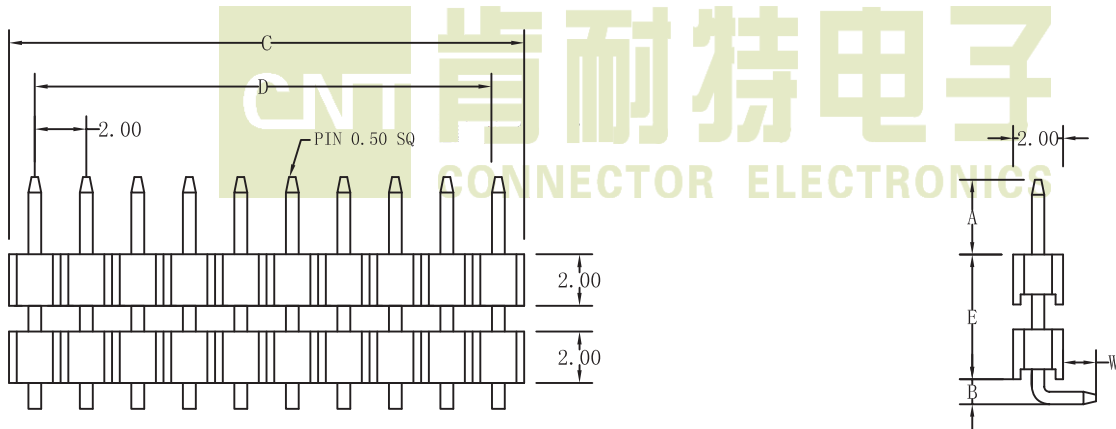

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.00*No.of Contacts	±0.30
D	2.00*No.of Contacts-2.00	±0.25

Ordering Information

M 200 1 * XX G D A/E/W/B
 M: Pitch: 1: No. of pins per Row
 Male 2.00mm Single Row
 G: GoldPlated
 T: Tin Plated
 D: Right Angle
 A/E/W/B: Custom Length Available