


# Pitch:2.00mm (0.079")

## Dual Row Pin Header Right Angle Dip Type



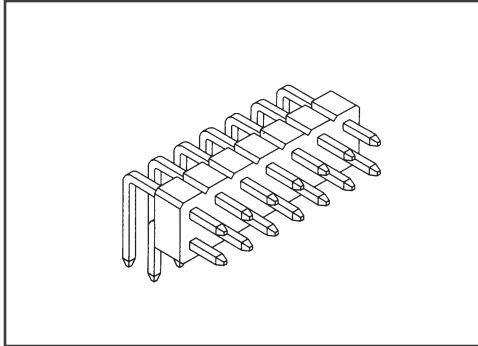


### SPECIFICATIONS


Current Rating:2.0 Amps  
 Insulator resistance:1000 Megohms Min.  
 Dielectric withstanding:AC 500 V  
 Contact Resistance:20 Megohms Max  
 Operating Temperature:-40° C - +105° C

### MATERIALS

Contact Material:Brass  
 Insulator Material:P. B. T  
 Finish:Gold/Tin Plated

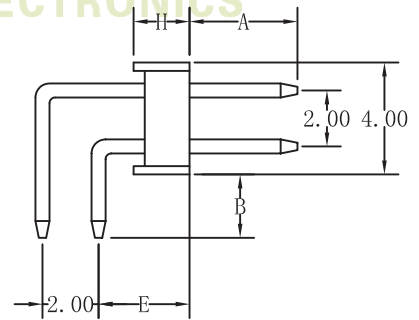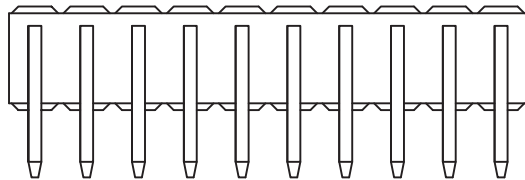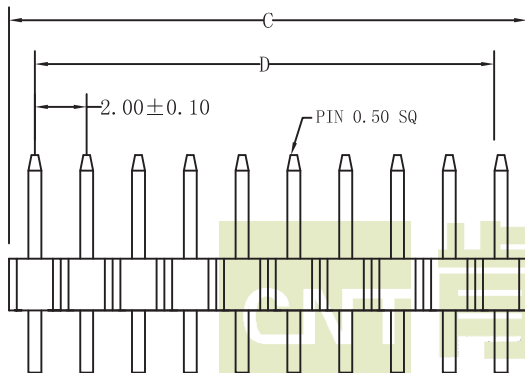

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.00*No.of Contacts	±0.38
D	2.00*No.of Contacts-2.0	±0.25

### Ordering Information

**M** 200 2 \* XX **G** **D** **A/B/E** **H**  
 M: Pitch: 2: No. of pins per Row G: GoldPlated D: Right Angle A/B/E: Custom Length Available H: 2.00mm  
 Male 2.00mm Dual Row T: Tin Plated