


# Pitch:2.00mm (0.079")

## Dual Row Pin Header S.M.T Type With Post



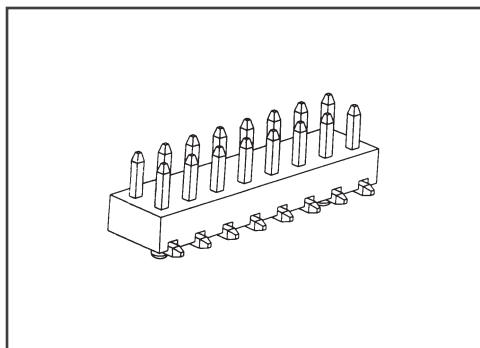


### SPECIFICATIONS


Current Rating:2.0 Amps  
 Insulator resistance:1000 Megohms Min.  
 Dielectric withstanding:AC 500 V  
 Contact Resistance:20 Megohms Max  
 Operating Temperature:-40° C - +105° C

### MATERIALS

Contact Material:Brass  
 Insulator Material: NYLON-6T UL94V-0  
 Finish:Gold/Tin Plated

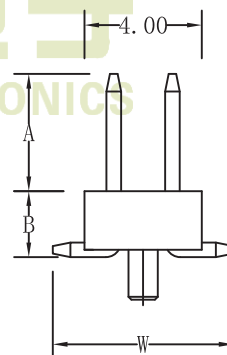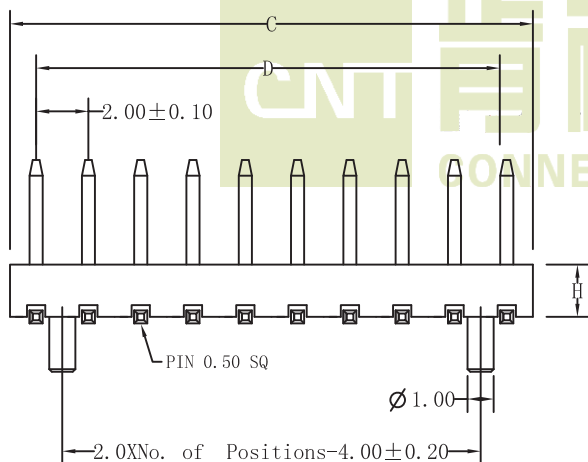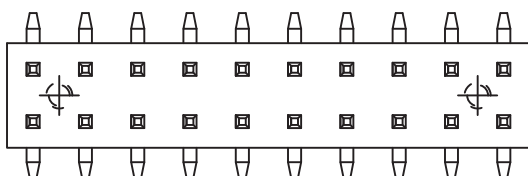

Recommended P. C. Board Hole Layout

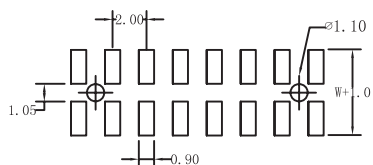

No. of Pins Per Row		03~25
Dimension		
C	2.00*No.of Contacts	±0.38
D	2.00*No.of Contacts-2.0	±0.25

### Ordering Information

**M** **200** **2** **\*** **XX** **G** **M** **A/W/B** **H** **P**  
 M: Pitch: 2: No. of pins per Row G: GoldPlated M: S.M.T A/W/B: Custom Length Available H: 2.00MM 1.50MM P: Post  
 Male 2.00mm Dual Row T: Tin Plated