
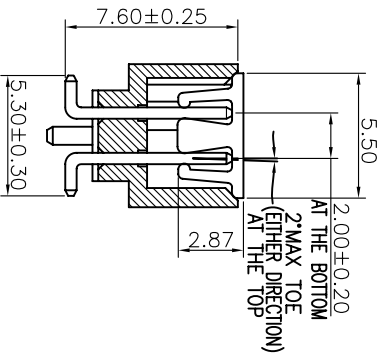
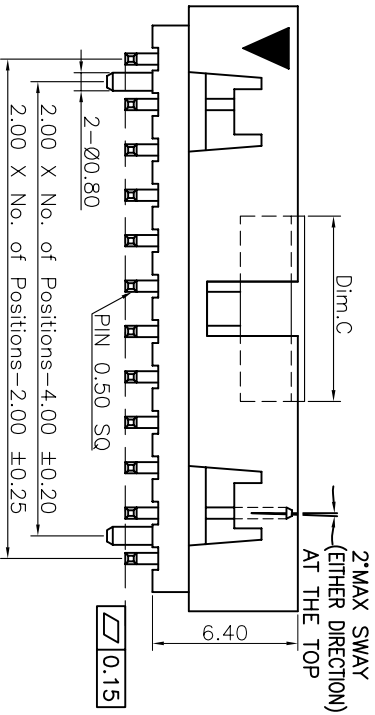


REV	DESCRIPTION	DATE
A	新发行	20140902


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS
 Contact Material: Brass
 Insulator Material: nylon 6T
 Finish: Gold Plated

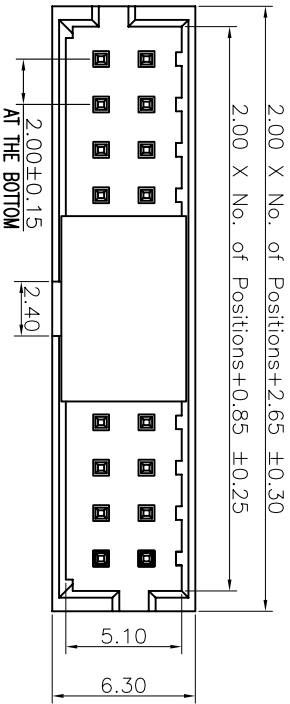

Recommended P. C. Board Hole Layout

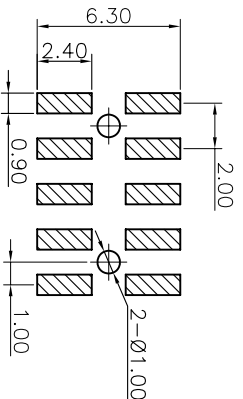

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
A	MM	1:1

GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
X.° ±5°	X. ±0.38	ARES	20150417		2.0mm Box Header SMT Type
X.° ±4°	.X ±0.25	CHECK	DATE	PART. NO.	
.XX° ±3°	.XX ±0.15	APPROVE	DATE	CNT-B200-2*XX-GM-5.3-P	
.XXX° ±2°	.XXX ±0.10				