
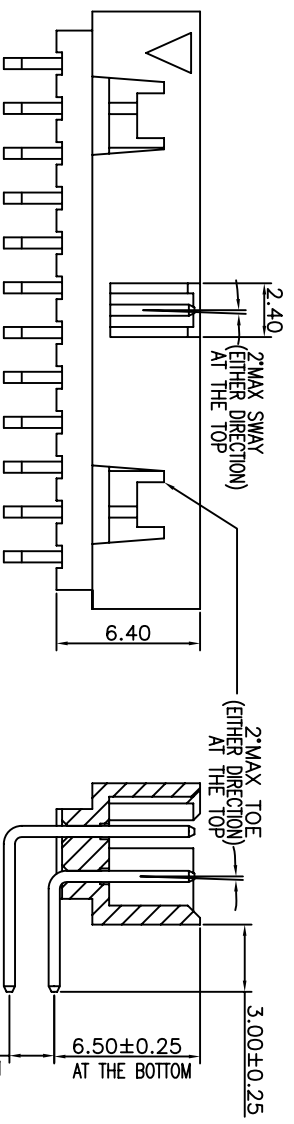


REV	DESCRIPTION	DATE
A	新发行	20140902

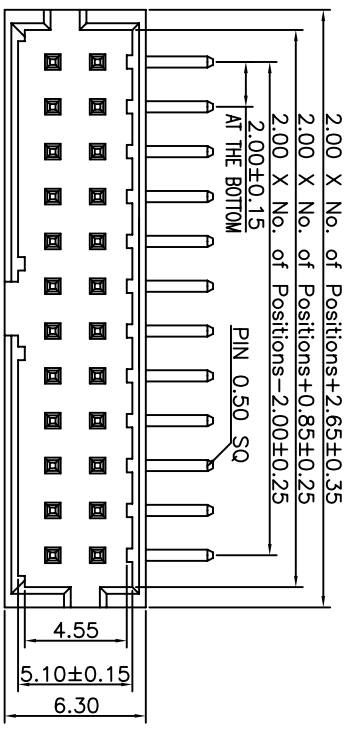


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Insulator Material: nylon 6T
 Finish: Gold Plated

Recommended P. C. Board Hole Layout



A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE												
A	MM	1:1	<table border="1"> <tr> <td>X° ±5°</td> <td>X</td> <td>±0.38</td> </tr> <tr> <td>X° ±4°</td> <td>X</td> <td>±0.25</td> </tr> <tr> <td>.XX° ±3°</td> <td>.XX</td> <td>±0.15</td> </tr> <tr> <td>.XXX° ±2°</td> <td>.XXX</td> <td>±0.10</td> </tr> </table>	X° ±5°	X	±0.38	X° ±4°	X	±0.25	.XX° ±3°	.XX	±0.15	.XXX° ±2°	.XXX	±0.10	ARES	20150421		2.0mm Box Header Right angle Type
X° ±5°	X	±0.38																	
X° ±4°	X	±0.25																	
.XX° ±3°	.XX	±0.15																	
.XXX° ±2°	.XXX	±0.10																	
			CHECK			PART. NO. CNT-B200-2*XX-GD-3.0-P													
			APPROVE																