


Pitch:2.00mm (0.079")

Dual Row Female Header S.M.T Type With Post

CNT


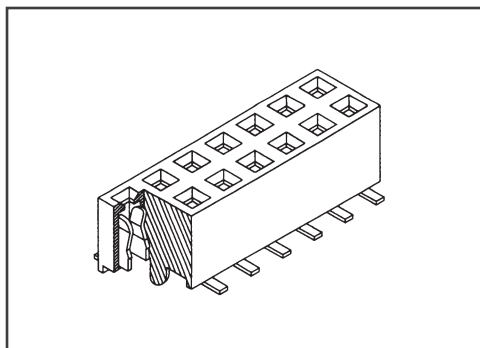


SPECIFICATIONS



Current Rating:2.0 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:NYLON-6T UL94V-0
 Finish:Gold/Tin Plated

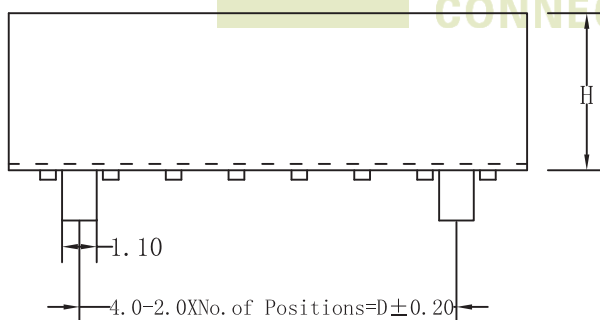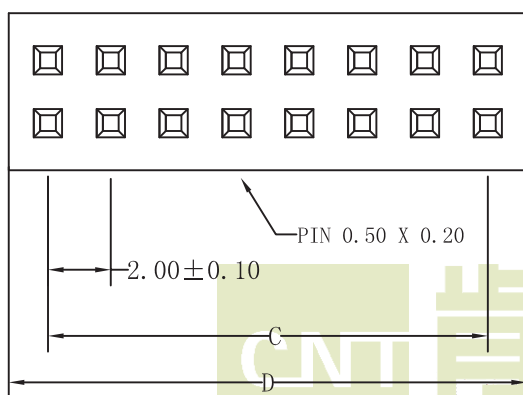

Recommended P. C. Board
Hole Layout

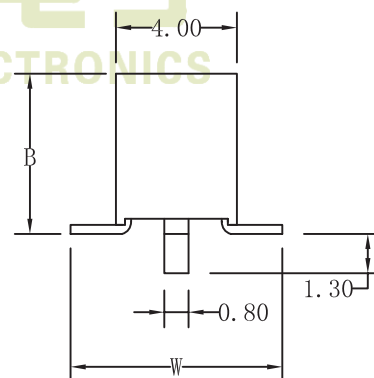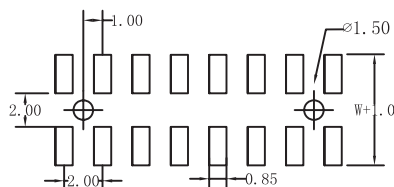

No. of Pins Per Row		04~40
Dimension		
C	2.00*No.of Contacts-2.0	±0.25
D	2.00*No.of Contacts+0.6	±0.38

Ordering Information

F **200** **2** ***** **XX** **G** **M** **H** **B/W** **P**
 F: Pitch: 2: No. of pins G: GoldPlated M: S.M.T H: 4.3MM B/W Custom Length Post
 Female 2.00mm Dual Row per Row T: Tin Plated