


Pitch:2.00mm (0.079")

Dual Row Female Header Side Entry S.M.T Type

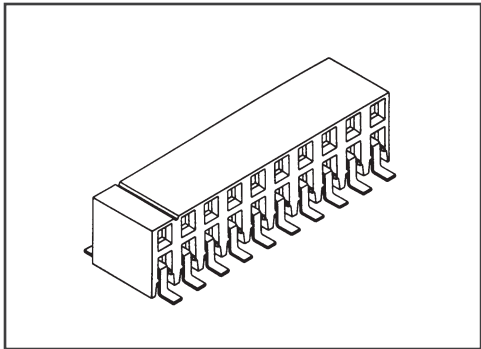


SPECIFICATIONS



Current Rating:2.0 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:NYLON-6T UL94V-0
 Finish:Gold/Tin Plated

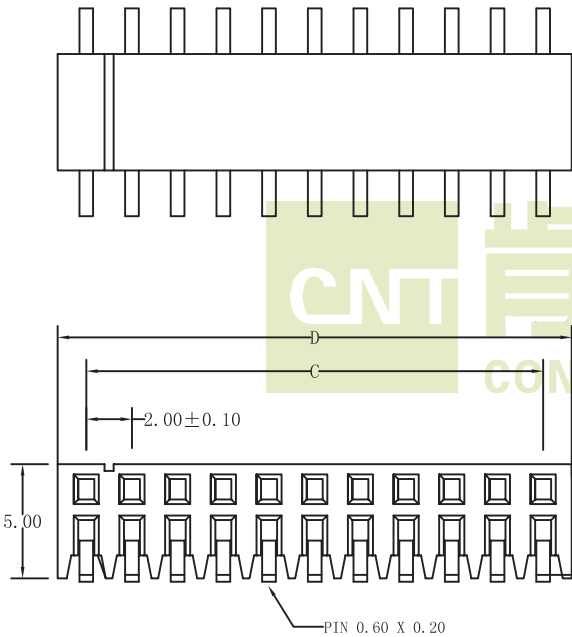

Recommended P. C. Board
Hole Layout

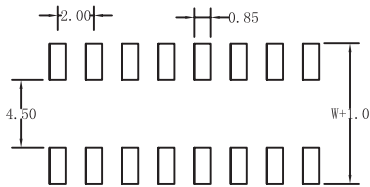

No. of Pins Per Row		03~25
Dimension		
C	2.00*No.of Contacts-2.0	±0.25
D	2.00*No.of Contacts+0.4	±0.38

Ordering Information

F

200

2

*

XX

G

SM

500

F:
Female

Pitch:
2.00mm

2:
Dual Row

No.of pins
per Row

G:
GoldPlated

T:
Tin Plated

Side Entry
S.M.T

Plastic Height