


Pitch:2.54mm (0.1")

Dual Row Box Header Straight Dip Type



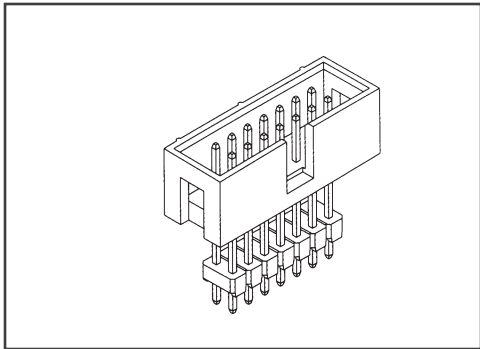


SPECIFICATIONS


Current Rating: 3 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 500 V
Contact Resistance:20 Megohms Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
Insulator Material:30% Glass filled
P. B. T UL94V-0
Finish:Gold /Tin Plated over nickel

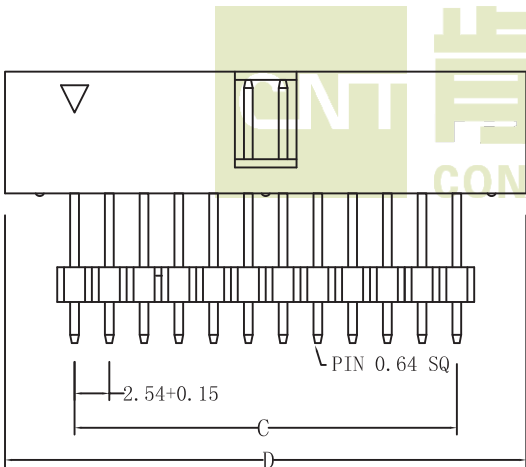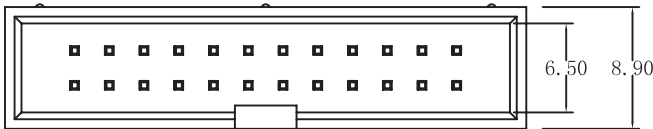

Recommended P. C. Board Hole Layout



No. of Pins Per Row	03~32
Dimension	
C	2.54*No.of Contacts-2.54 ±0.25
D	2.54*No.of Contacts+7.65 ±0.38

Ordering Information

B 254 2 * XX G S H/B
B: Pitch: 2: No. of pins per Row G: GoldPlated S: Straight H/B: Custom Length Available
Box 2.54mm Dual Row T: Tin Plated