


Pitch:2.54mm (0.1")

Dual Row Box Header S.M.T Type



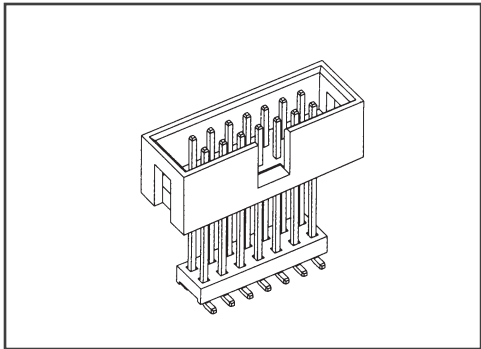


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Brass
 Insulator Material:30% Glass filled
 P. B. T UL94V-0
 Finish:Gold /Tin Plated over nickel

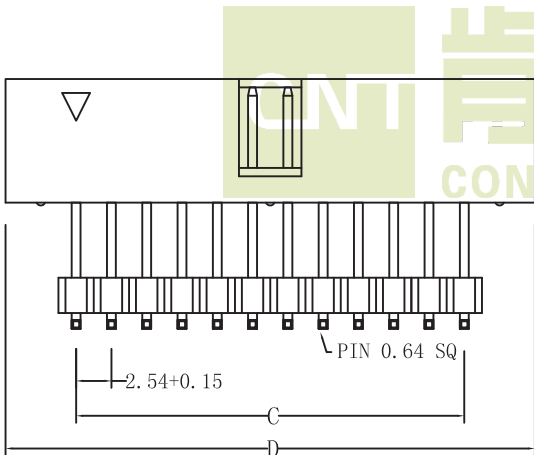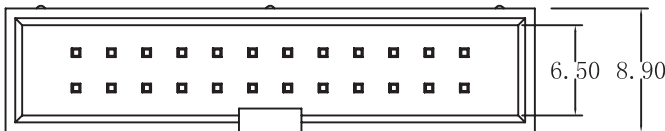

Recommended P. C. Board Hole Layout



No. of Pins Per Row		03~32
Dimension		
C	2.54*No.of Contacts-2.54	±0.25
D	2.54*No.of Contacts+7.65	±0.38

Ordering Information

B **254** **2** ***** **XX** **G** **M** **A/E/B**
 B: Pitch: 2: No. of pins per Row G: GoldPlated M: S. M. T Custom Length Available
 Box 2.54mm Dual Row T: Tin Plated