
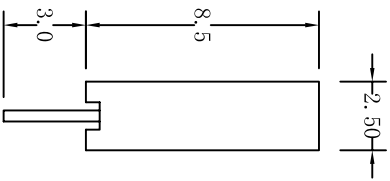


REV	DESCRIPTION	DATE

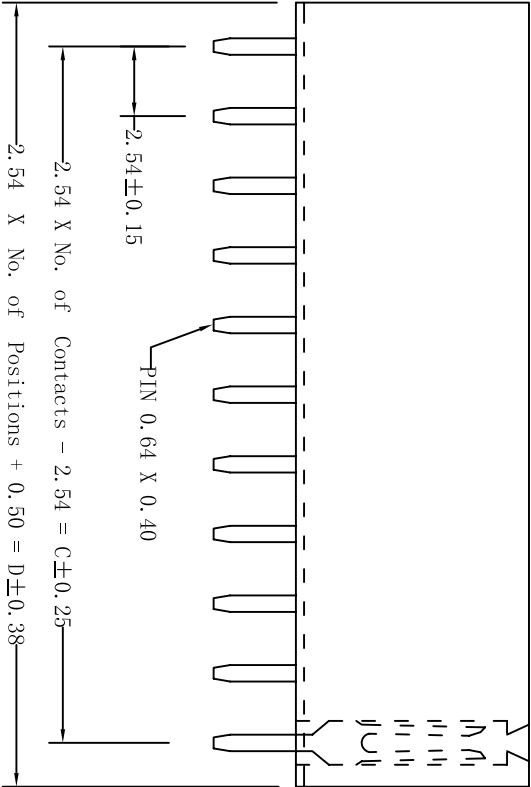


### SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 1000 Megohms Min.  
 Dielectric withstanding: AC 500 V  
 Contact Resistance: 20 Megohms Max  
 Operating Temperature: -40° C - +105° C

**MATERIALS**  
 Contact Material: Brass  
 Insulator Material: 30% Glass filled  
 P. B. T UL94V-0  
 Finish: Gold / Tin Plated over nickel

**Recommended P. C. Board  
 Hole Layout**



A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X. °	. X° ±	Ares Zhao	20120308	CNT-F254-1*xx-GS-850	2.54mm Female Header Single Row Straight
			XX. ±5°	. XX ±0.38	CHECK	DATE		
			XXX. ±5°	. XXX ±0.38	APPROVE	DATE		