


Pitch:2.54mm (0.1")

Dual Row Female Header Dip Type



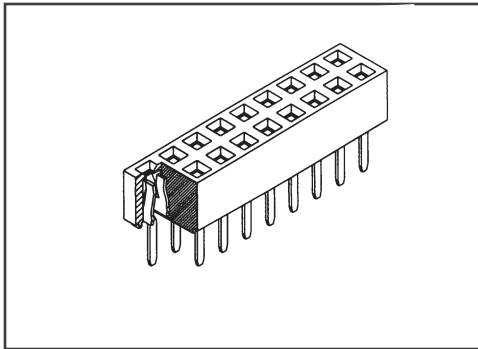


SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance:1000 Megohms Min.
 Dielectric withstanding:AC 500 V
 Contact Resistance:20 Megohms Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:30% Glass filled
 P.B.T UL94V-0
 Finish:Gold /Tin Plated over nickel

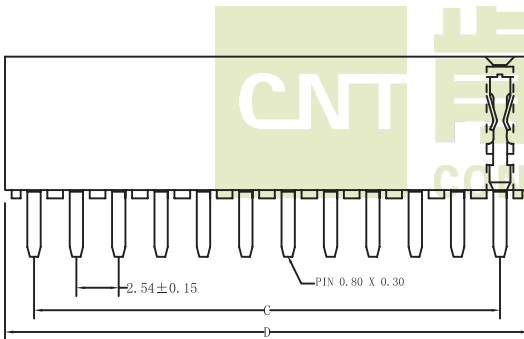

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.54*No.of Contacts-2.54	±0.25
D	2.54*No.of Contacts+0.8	±0.38

Ordering Information

F 254 2 * XX G S 850
 F: Female Pitch: 2.54mm 2: Dual Row *: No. of pins per Row XX: No. of pins per Row
 G: GoldPlated S: Straight 850: Plastic Height
 T: Tin Plated