


Pitch:2.54mm (0.1")
Dual Row Female Header S.M.T Type

CNT

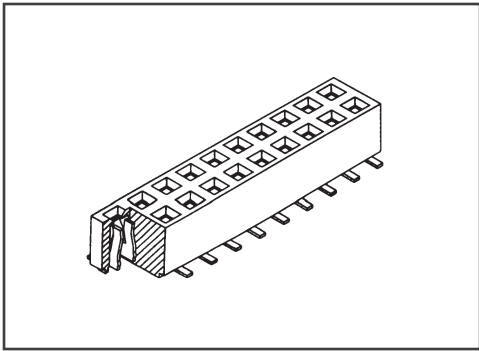

SPECIFICATIONS

Current Rating: 3 Amps

Insulator resistance:1000 Megohms Min.

Dielectric withstanding:AC 500 V

Contact Resistance:20 Megohms Max

Operating Temperature:-40° C - +105° C



MATERIALS

Contact Material:Copper Alloy


Insulator Material:30% Glass filled

P. B. T UL94V-0

Finish:Gold /Tin Plated over nickel

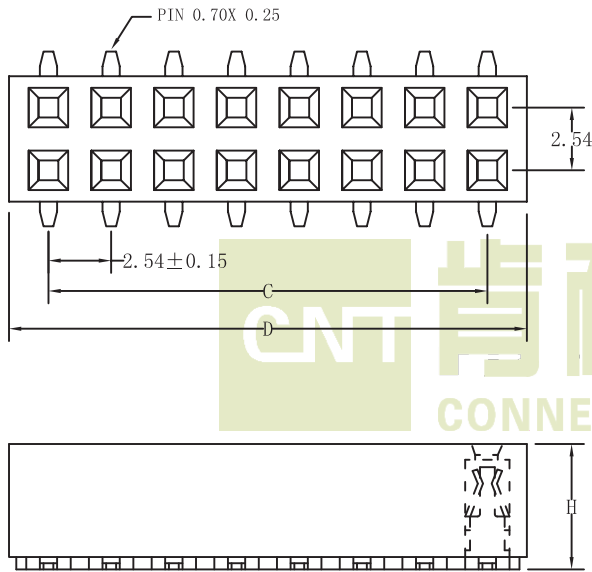

Recommended P. C. Board Hole Layout



No. of Pins Per Row		02~40
Dimension		
C	2.54*No.of Contacts-2.54	±0.25
D	2.54*No.of Contacts+0.5	±0.38

Ordering Information

F **254** **2** ***** **XX** **G** **M** **500** **W**
F: Pitch: 2: No. of pins G: M: Plastic Height 7.0mm
Female 2.54mm Dual Row per Row GoldPlated S. M. T Custom Length
T: Tin Plated Available