

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C



MATERIALS

Contact Material: Phosphor Bronze
 Insulator Material: NYLON 6T UL94V-0
 Finish: 15U"Gold Selective Plating

A	E
B	F
H	W

Ordering Information

CNT-F254-2*XX-GM-350/6-6-TR

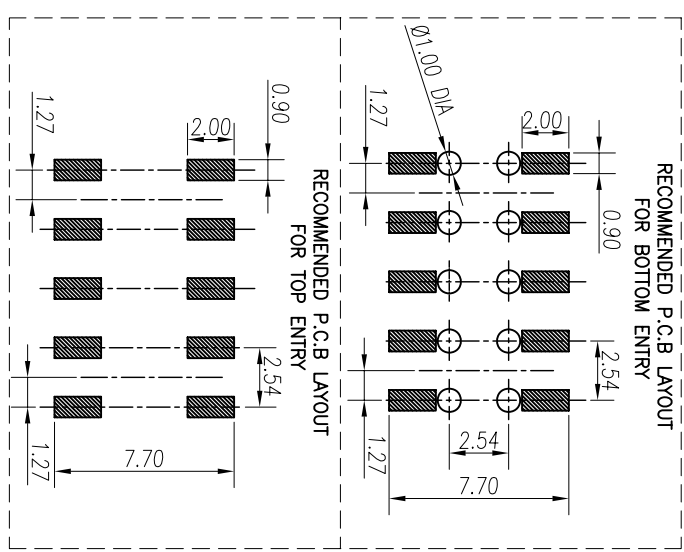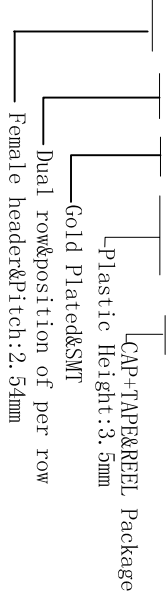

CNT

肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN AREAS	DATE	DWG. NO.	TITLE
XX.			X.° ±5°	CHECK	20150302	PART. NO.	2.54mm Female Header Single Row Right Angle
XXX.			.XX ±5°	APPROVE		CNT-F254-2*XX-GM-350/6-6-TR	
			.XXX ±5°				