



SPECIFICATIONS

- Current Rating: 3 Amps
 - Insulator resistance: 1000 Megohms Min.
 - Dielectric withstanding: AC 500 V
 - Contact Resistance: 20 mΩ Max
 - Operating Temperature: -40° C - +105° C
- MATERIALS**
- Contact Material: Brass
 - Insulator Material: NYLON 6T UL94V-0
 - Finish: Gold Plated over nickel

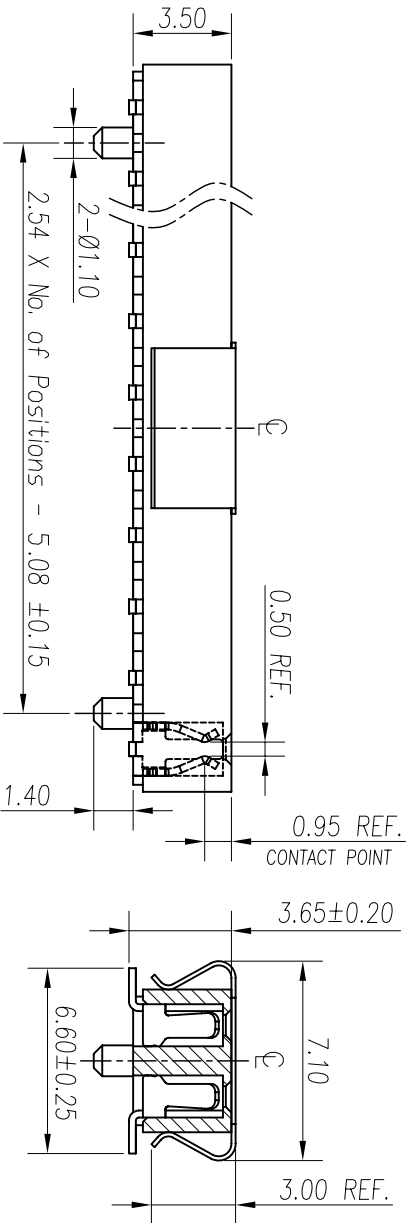

Recommended P. C. Board Hole Layout

FOR BOTTOM ENTRY

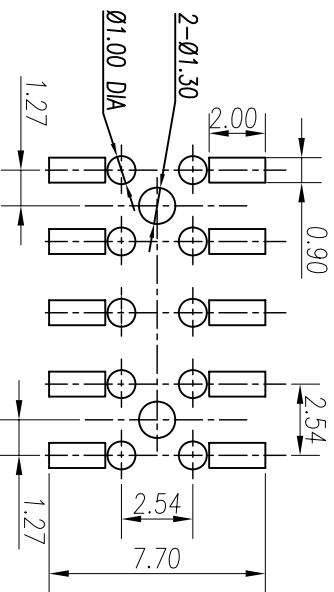

Ordering Information

CNT-F254-2*XX-GM-350/6.6-P-TR

- CAP+TAP&REEL Package
- Plastic Height: 3.5mm
- Gold Plated SMT
- Dual row position of per row
- Female header Pitch: 2.54mm

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
------	------	-------

GENERAL	TOLERANCE
X°	±5°
X	±5°
XX	±5°
XXX	±5°

DRAWN	AREAS	DATE
CHECK		20150302
APPROVE		

DWG. NO.	PART. NO.
	CNT-F254-2*XX-GM-350/6.6-P-TR

TITLE
2.54mm Female Header Single Row Right Angle

REV	DESCRIPTION	DATE