

REV	DESCRIPTION	DATE



SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator resistance: 1000 Megohms Min.
- Dielectric withstanding: AC 500 V
- Contact Resistance: 20 mΩ Max
- Operating Temperature: -40° C - +105° C

MATERIALS

- Contact Material: Phosphor Bronze
- Insulator Material: LCP UL94V-0
- Finish: Gold Plated over nickel
- Resistance to soldering heat: 260° C ±5C/5±0.5sec

Recommended P. C. Board Hole Layout

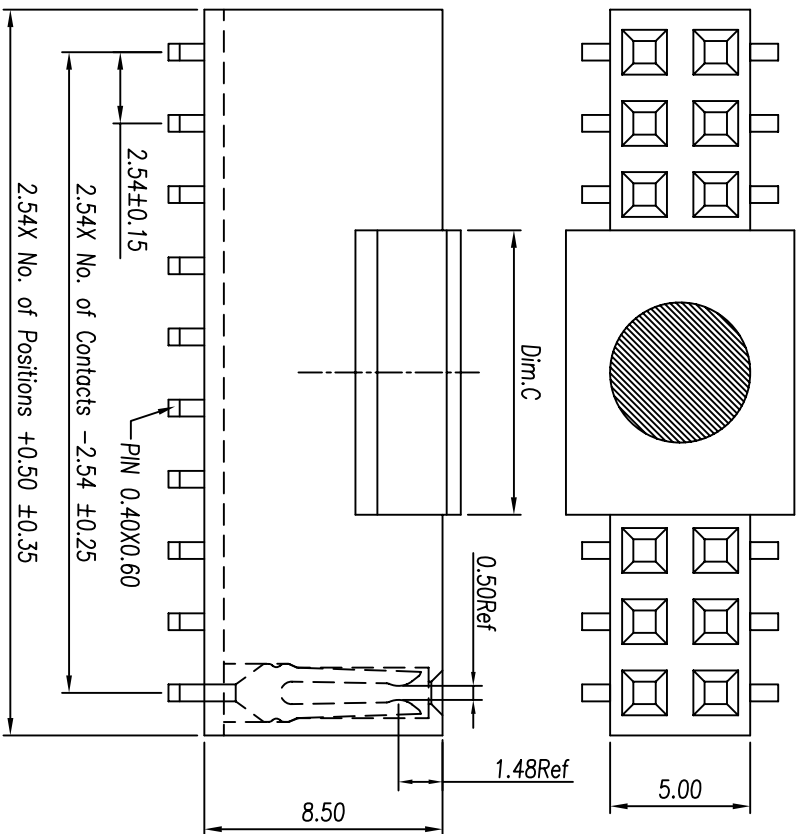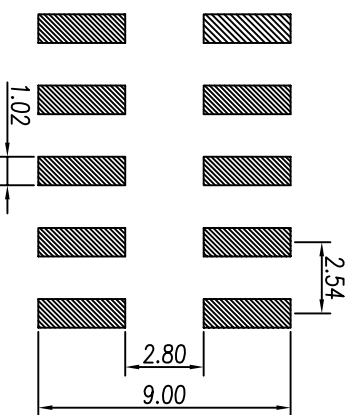

Dim. C	NOTE
4.00mm	02~03Pin
10.15mm	04~40Pin

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE
XXX			X.° ±5° X. ±5° XX ±5° XXX ±5°
			.X° ± .X ±0.38 .XX ±0.38 .XXX ±0.38

DRAWN AREAS	CHECK	APPROVE	DATE
			20151203

DWG. NO.	PART. NO.
	CNT-F254-2*XX-GM-850/7.87/1.27-TR

TITLE
2.54mm
Female Header
Single Row
Right Angle