
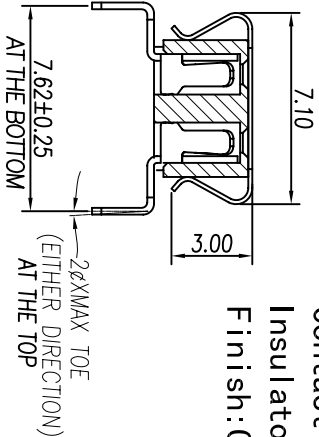
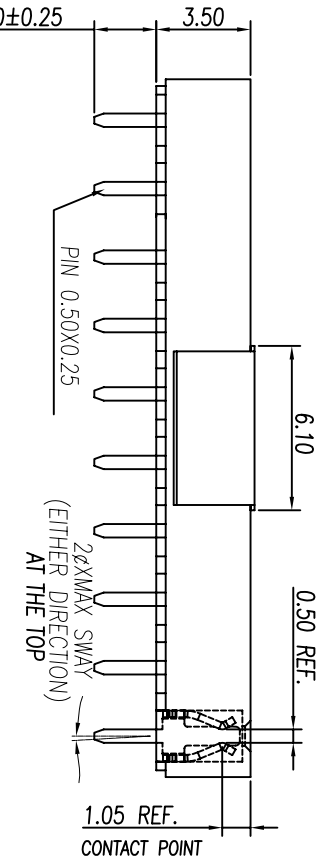


REV	DESCRIPTION	DATE


SPECIFICATIONS

Current Rating:3 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 500 V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS
Contact Material:Brass
Insulator Material:NYLON 6T UL94V-0
Finish:Gold Plated over nickel

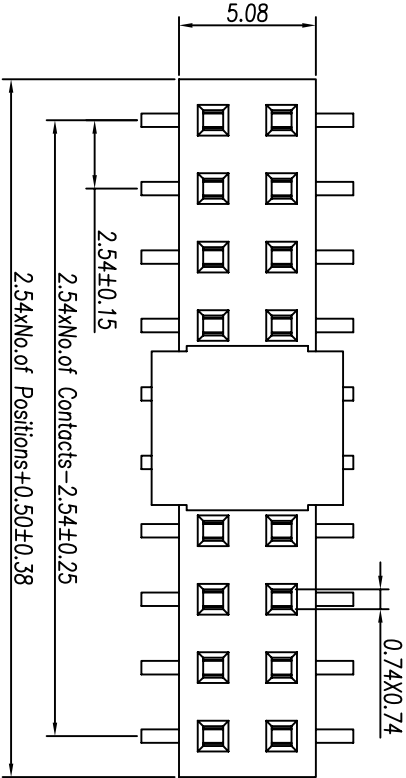


Recommended P. C. Board
Hole Layout

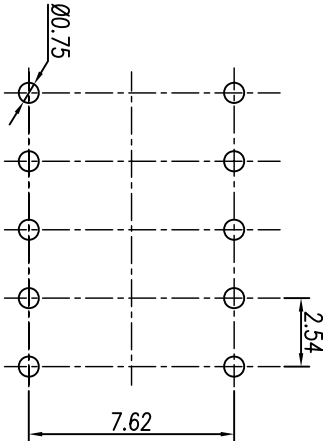

Ordering Information

CNT-F254-2*XX-GC-350/7.62



A	E	
B	F	
H	W	

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN ARES	DATE	DWG. NO.	TITLE
			X.° ±5° .X° ± X. ±5° .X ±0.38 XX. ±5° .XX ±0.38 XXX. ±5° .XXX ±0.38	CHECK	DATE		
				APPROVE	DATE	PART. NO. CNT-F254-2*XX-GC-350/7.62	Female Header Single Row Right Angle