


Pitch:2.54mm (0.1")

Dual Row Female Header S.M.T Type



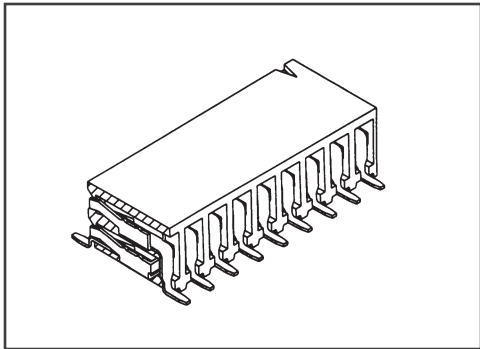


SPECIFICATIONS


Current Rating: 3 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 500 V
Contact Resistance:20 Megohms Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:30% Glass filled
P.B.T UL94V-0
Finish:Gold /Tin Plated over nickel

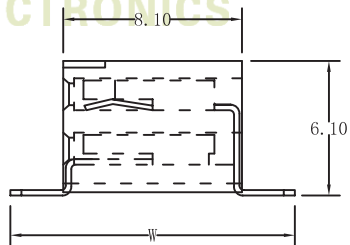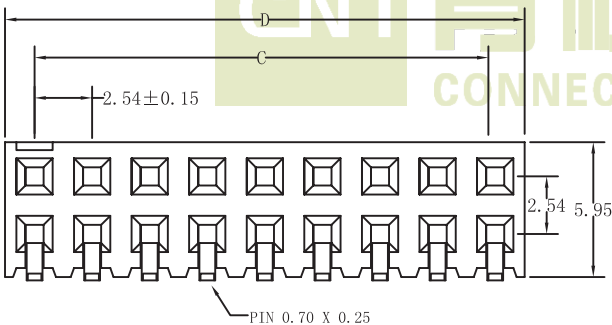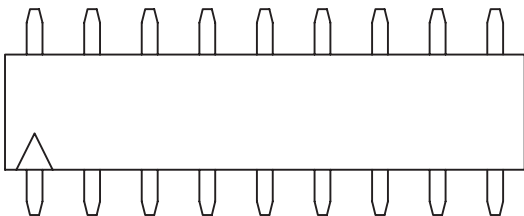

Recommended P.C. Board Hole Layout



No. of Pins Per Row	02~40
Dimension	
C	2.54*No.of Contacts-2.54 ±0.25
D	2.54*No.of Contacts ±0.38

Ordering Information

F **254** **2** ***** **XX** **G** **M** **595** **W**
F: Female Pitch: 2: 2.54mm Dual Row No. of pins per Row G: GoldPlated M: S.M.T T: Tin Plated
Custom Length Available