
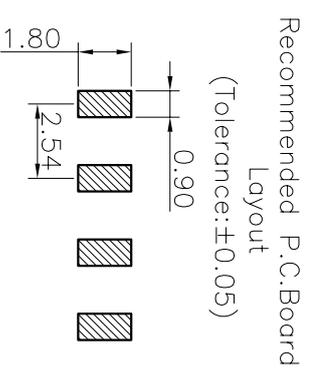
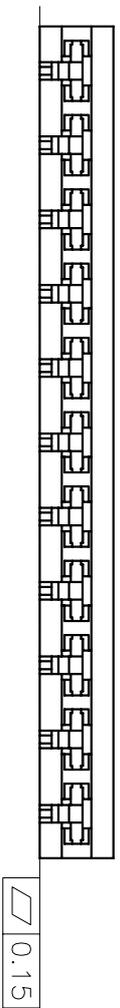
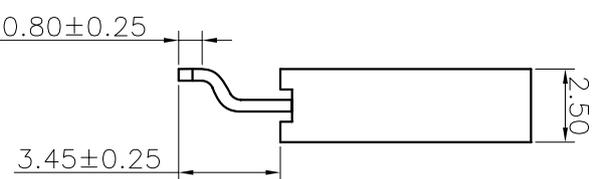


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2009.08.20	卓 激
02	△	依上級要求變更圖號	2013.01.31	李芳忠
03	△	依業務要求增加米色塑膠	2015.05.06	李芳忠

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

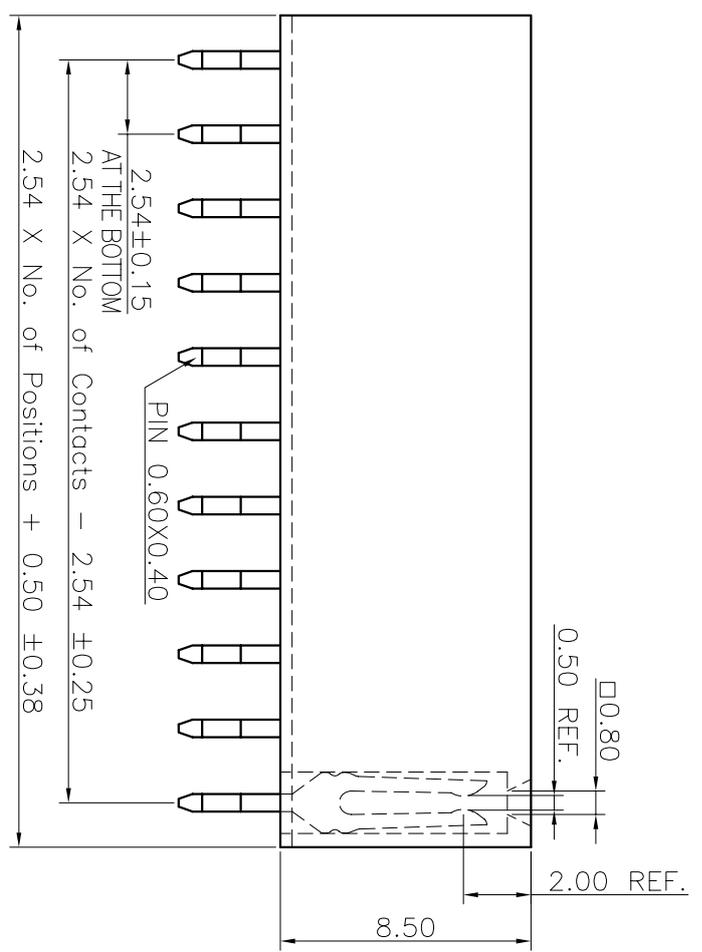

REV. 03		UNIT. mm	SCALE. 4:1	PAGE. 1/1	DESIGNED: 李芳忠		DATE: 2015.05.06	DWG. NO. △	TITLE. 2.54 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR
GENERAL TOLERANCE		X. ± 5.0°	X. ± 0.30	CHECKED:	CO SIGNED: 劉北平	DATE: 2015.05.06	PART NO. CNT-F254-1XXX-GDM-858-3.45		
		.XX ± 2.0°	.XX ± 0.25	APPROVED:	DATE:				
		.XXX ± 1.0°	.XXX ± 0.10						

CNT 肯耐特电子有限公司

