
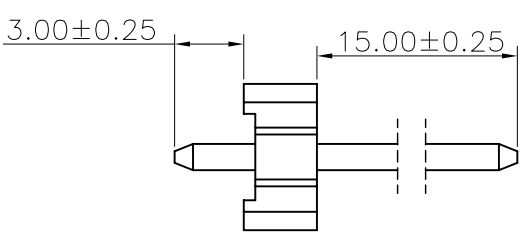
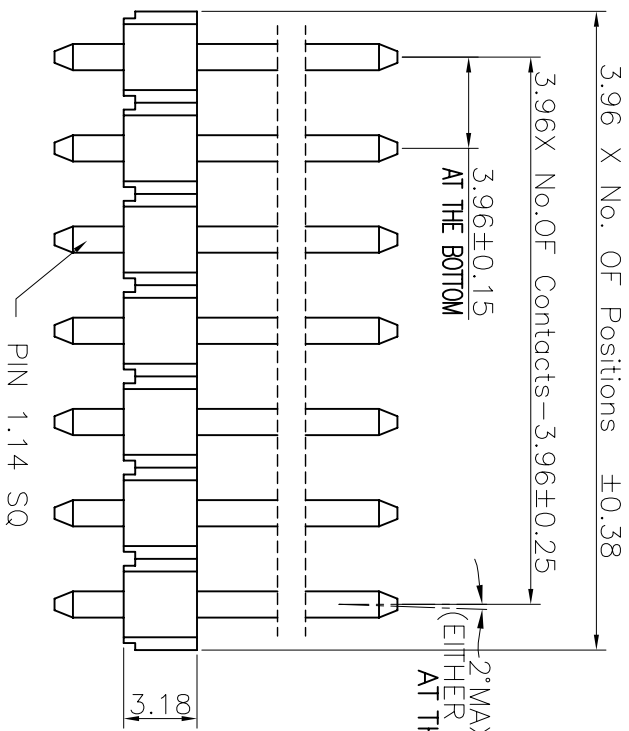



REV	DESCRIPTION	DATE

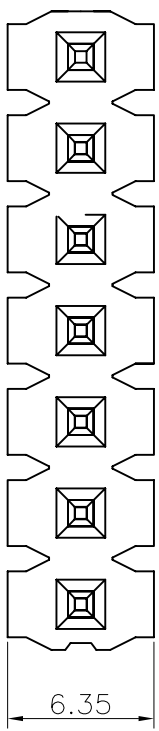

### SPECIFICATIONS

- Current Rating: 7.9 Amps
  - Insulator resistance: 1000 mΩ Min.
  - Dielectric withstanding: AC/DC 1000 V
  - Contact Resistance: 30m Ω Max
  - Operating Temperature: -40° C – +105° C
- ### MATERIALS
- Contact Material: Brass
  - Insulator Material: LCP UL94V-0
  - Finish: Tin Plated over nickel
  - Resistance to soldering heat: 260° C ±5° C
  - 5+ -0.5sec

**Recommended P. C. Board Hole Layout**

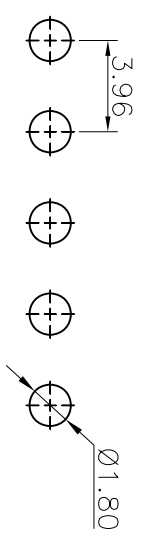

A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE
1.0	mm	1:1	X. ° ±5° X. ±5° XX. ±5° XXX. ±5°

TOLERANCE	DRAWN	DATE
X. ° ± X. ±0.38 XX. ±0.25 XXX. ±0.15	Ares	20170518
CHECK	APPROVE	DATE

DWG. NO.	PART. NO.
CNT-M396-1*xx-TS-15/3-1	

TITLE 3.96mm  
Pin Header Board  
Spacer Single Row  
Straight