



REV	DESCRIPTION	DATE

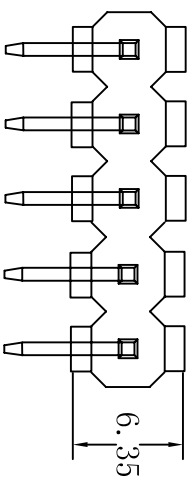


### SPECIFICATIONS

- Current Rating: 7.9 Amps
  - Insulator resistance: 1000 Megohms Min.
  - Dielectric withstanding: AC/DC 1500 V
  - Contact Resistance: 20m  $\Omega$  Max
  - Operating Temperature: -40° C – +105° C
- MATERIALS**
- Contact Material: Brass
  - Insulator Material: LCP UL94V-0
  - Finish: TIN Plated over nickel

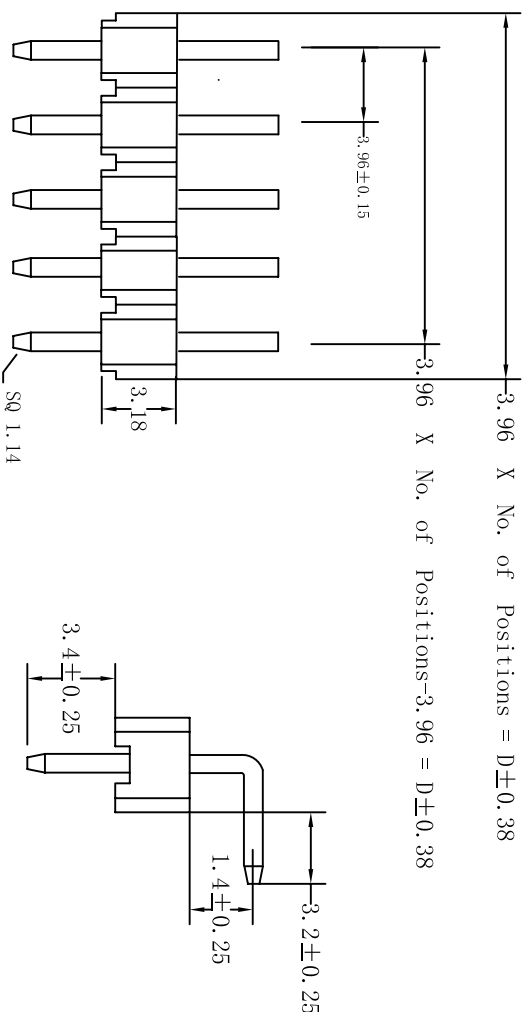

Recommended P. C. Board  
Hole Layout

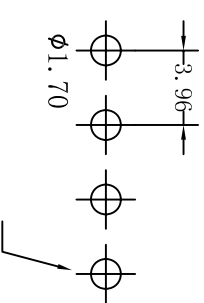

A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE			DRAWN	DATE	DWG. NO.	TITLE
			X.°	±5°	.X°				
1.0	mm	1:1	X.	±5°	.X	Ares	20150311	CNT-M396-1*XX-TR-3.2/3.4/1.4	Pin Header Board Spacer Single Row Right Angle
			XX.	±5°	.XX	CHECK	DATE		
			XXX.	±5°	.XXX	APPROVE	DATE		