


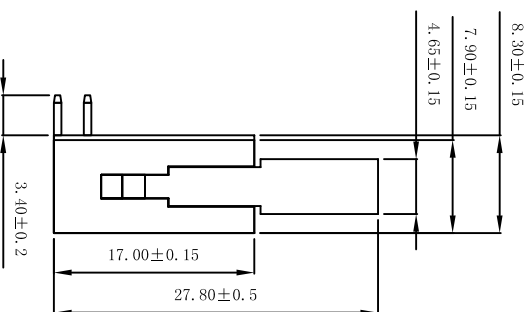
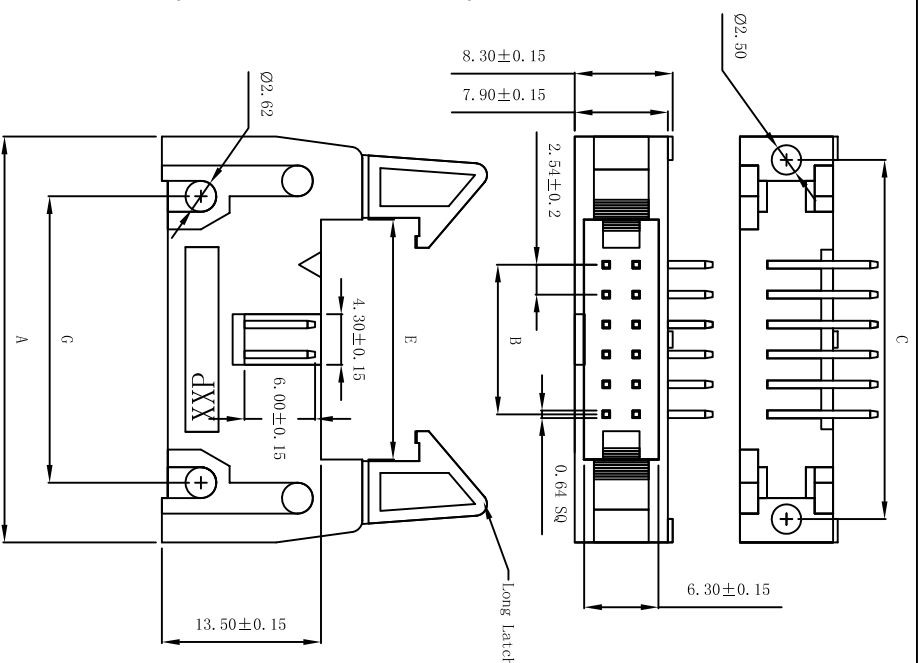


Technical Data
 Material: Brass
 Contact material: Gold Flash
 Insulator material: Black polyester U194V-0
 Standard: PBT+30%G.F


Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding voltage: 550V AC/minute

Mechanical:
 Soldering temperature: +220°C, 10s max


UNSPECIFIED TOLERANCE: ± 0.20



(10, 14, 16PIN)
一个缺口



(20, 24, 26, 30, 34, 40, 50PIN)
二个缺口



(60, 64PIN)
三个缺口


- A=2.54* $\frac{nP}{2}$ +19.2 \pm 0.25
- B=2.54* $\frac{nP}{2}$ -2.54 \pm 0.20
- C=2.54* $\frac{nP}{2}$ +15.24 \pm 0.25
- D=2.54* $\frac{nP}{2}$ \pm 0.25
- E=2.54* $\frac{nP}{2}$ +5.12 \pm 0.25
- G=2.54* $\frac{nP}{2}$ +9.06 \pm 0.25

NUMBER	Dimensions		
	A	B	C
6	26.82	5.08	22.86
8	29.36	7.62	25.4
10	31.90	10.16	27.94
12	34.44	12.7	30.48
14	36.98	15.24	33.02
16	39.52	17.78	35.56
18	42.06	20.32	38.1
20	44.60	22.86	40.64
24	49.58	27.94	45.72
26	52.22	30.48	48.26
30	57.30	35.56	53.34
34	62.38	40.64	58.42
40	70.00	48.26	66.04
50	82.70	60.96	78.74
60	95.40	73.66	91.44
64	100.48	78.74	96.72

P/N0: CNT-G254-2XXX-GD-01

牛角2.54 nP 90度 短耳扣系列

Customer:	Approval:	Unit	Scale	Date
Drawing:	Check:	mm		14.04.04



Pin Longger:

Signatuer:

CNT肯耐特电子有限公司