



REV	DESCRIPTION	DATE

### SPECIFICATIONS



- Current Rating: 3 Amps
- Insulator resistance: 1000 Megohms Min.
- Dielectric withstanding: AC 500 V
- Contact Resistance: 20m Ω Max
- Operating Temperature: -40° C - +105° C

### MATERIALS

- Contact Material: Brass
- Insulator Material: Nylon 6T
- Finish: Gold Plated over nickel
- Resistance to soldering heat: 260° C ± 5° C
- 5+-0.5sec
- Storage humidity : 30%-70%
- Storage time: semiannual

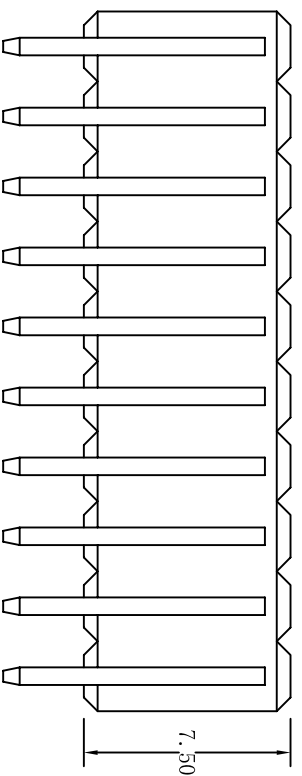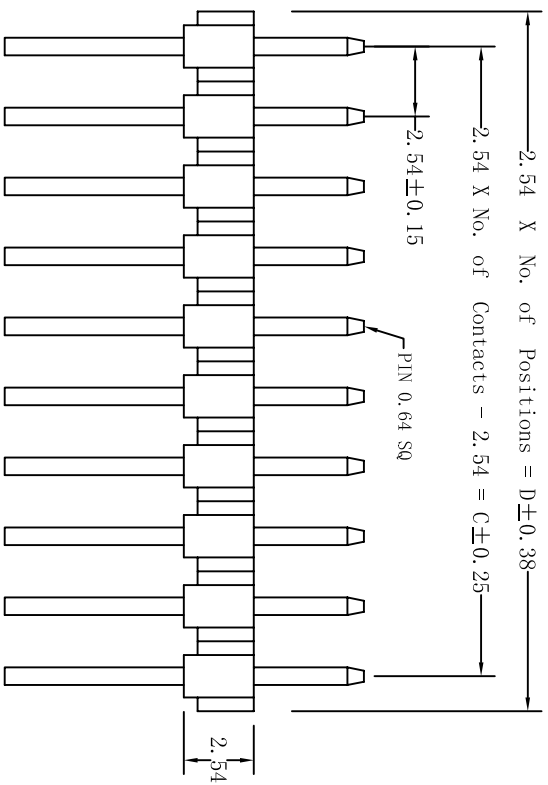

A	E
B	F
H	W

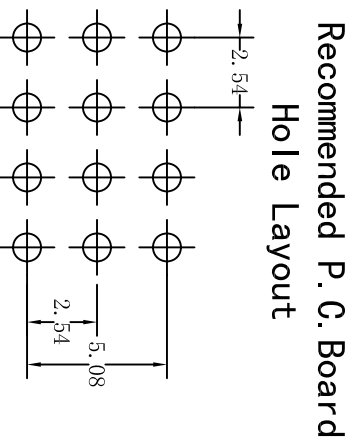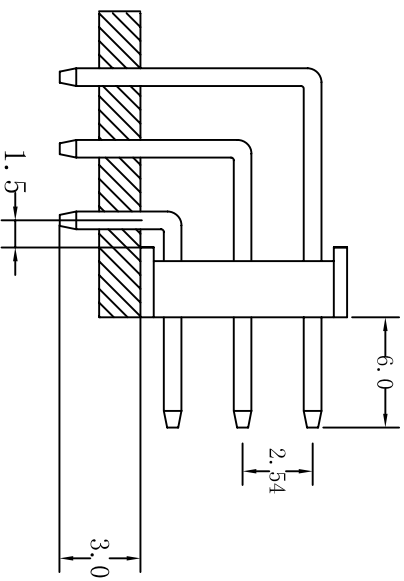

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
XXX.			±5°	Ares	20111117	CNT-M254-3*XX-GD-6/3/1.5-N	2.54mm Pin Header Triple Row Right Angle
XX.			±5°	CHECK	DATE		
X.			±5°	APPROVE	DATE		
.X			.X ±0.38				
.XX			.XX ±0.38				
.XXX			.XXX ±0.38				