



Pitch:1.00mm (0.039") Wire to Board Connector

Single Row Right angle S.M.T Type

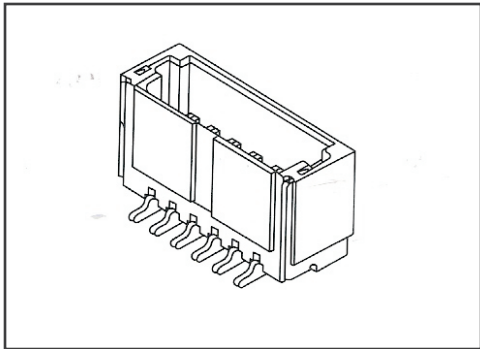

SPECIFICATIONS

Voltage rating: 50V AC, DC
Current rating: 1.0A AC/DC (AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance:100M Ω min
Temperature range:-25 $^{\circ}$ C - +85 $^{\circ}$ C
Contact resistance:20m Ω max
Material:Contact:Phos.Bronze, Tin Plated
Base:Nylon 46, UL94V-0

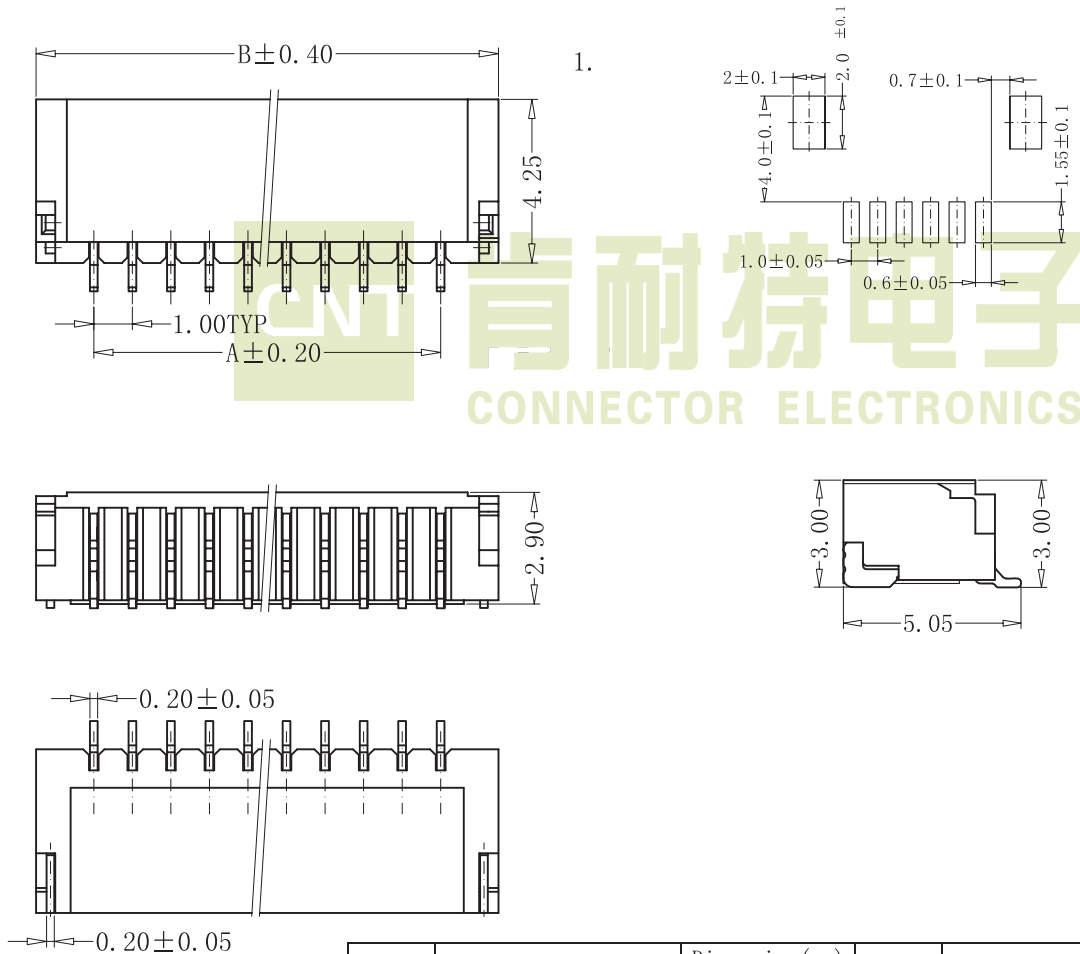

Poles	Part No.	Dimension (mm)		Poles	Part No.	Dimensi
		A	B			A
2	CNT-W100-1*2-TSM	1.00	4.00	12	CNT-W100-1*12-TSM	11.00
3	CNT-W100-1*3-TSM	2.00	5.00	13	CNT-W100-1*13-TSM	12.00
4	CNT-W100-1*4-TSM	3.00	6.00	14	CNT-W100-1*14-TSM	13.00
5	CNT-W100-1*5-TSM	4.00	7.00	15	CNT-W100-1*15-TSM	14.00
6	CNT-W100-1*6-TSM	5.00	8.00	16	CNT-W100-1*16-TSM	15.00
7	CNT-W100-1*7-TSM	6.00	9.00	17	CNT-W100-1*17-TSM	16.00
8	CNT-W100-1*8-TSM	7.00	10.00	18	CNT-W100-1*18-TSM	17.00
9	CNT-W100-1*9-TSM	8.00	11.00	19	CNT-W100-1*19-TSM	18.00
10	CNT-W100-1*10-TSM	9.00	12.00	20	CNT-W100-1*20-TSM	19.00
11	CNT-W100-1*11-TSM	10.00	13.00			