



Pitch:1.00mm (0.039") Wire to Board Connector

Single Row Straight S.M.T Type

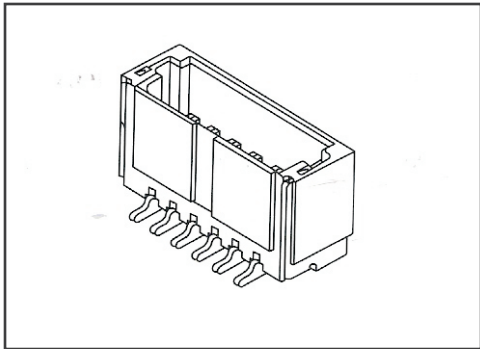

SPECIFICATIONS

Voltage rating: 50V AC, DC
Current rating: 1.0A AC/DC (AWG#28)
Withstanding voltage: 500V AC/minute
Insulation resistance: 100M Ω min
Temperature range: -25°C - +85°C
Contact resistance: 20m Ω max
Material: Contact: Phos. Bronze, Tin Plated
Base: Nylon 46, UL94V-0

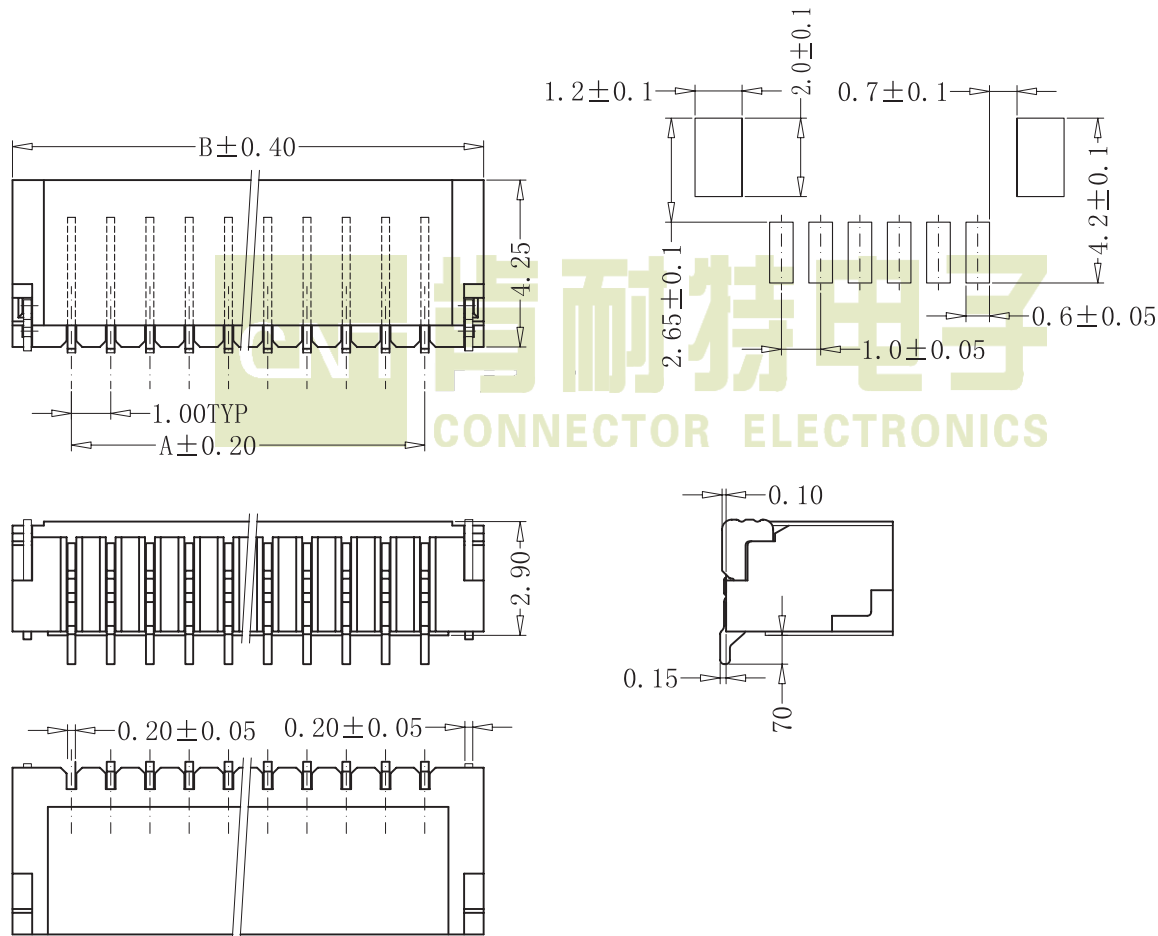

Poles	Part No.	Dimension (mm)		Poles	Part No.	Dimension (mm)	
		A	B			A	B
2	CNT-W100-1*2-TDM	1.00	4.00	12	CNT-W100-1*12-TDM	11.00	14.00
3	CNT-W100-1*3-TDM	2.00	5.00	13	CNT-W100-1*13-TDM	12.00	15.00
4	CNT-W100-1*4-TDM	3.00	6.00	14	CNT-W100-1*14-TDM	13.00	16.00
5	CNT-W100-1*5-TDM	4.00	7.00	15	CNT-W100-1*15-TDM	14.00	17.00
6	CNT-W100-1*6-TDM	5.00	8.00	16	CNT-W100-1*16-TDM	15.00	18.00
7	CNT-W100-1*7-TDM	6.00	9.00	17	CNT-W100-1*17-TDM	16.00	19.00
8	CNT-W100-1*8-TDM	7.00	10.00	18	CNT-W100-1*18-TDM	17.00	20.00
9	CNT-W100-1*9-TDM	8.00	11.00	19	CNT-W100-1*19-TDM	18.00	21.00
10	CNT-W100-1*10-TDM	9.00	12.00	20	CNT-W100-1*20-TDM	19.00	22.00
11	CNT-W100-1*11-TDM	10.00	13.00				