


Pitch:1.00mm (0.039") Wire to Board Connector


Dual Row S.M.T Type

CNT

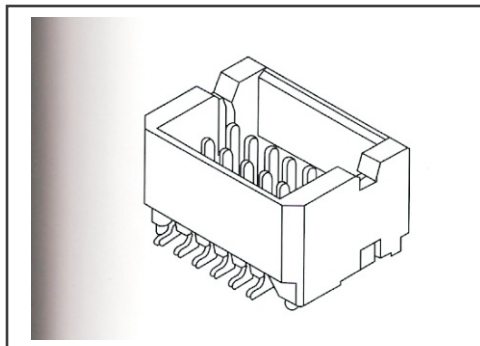

SPECIFICATIONS

Voltage Rating: 50VAC/DC
 Current rating: 1A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation resistance: 100M Ω min
 Temperature range: -25° C - +85° C
 Contact Resistance: 20m Ω max
 Material: Contact: Phos. Bronze, Tin Plated
 Base: Nylon 66 UL94V-0

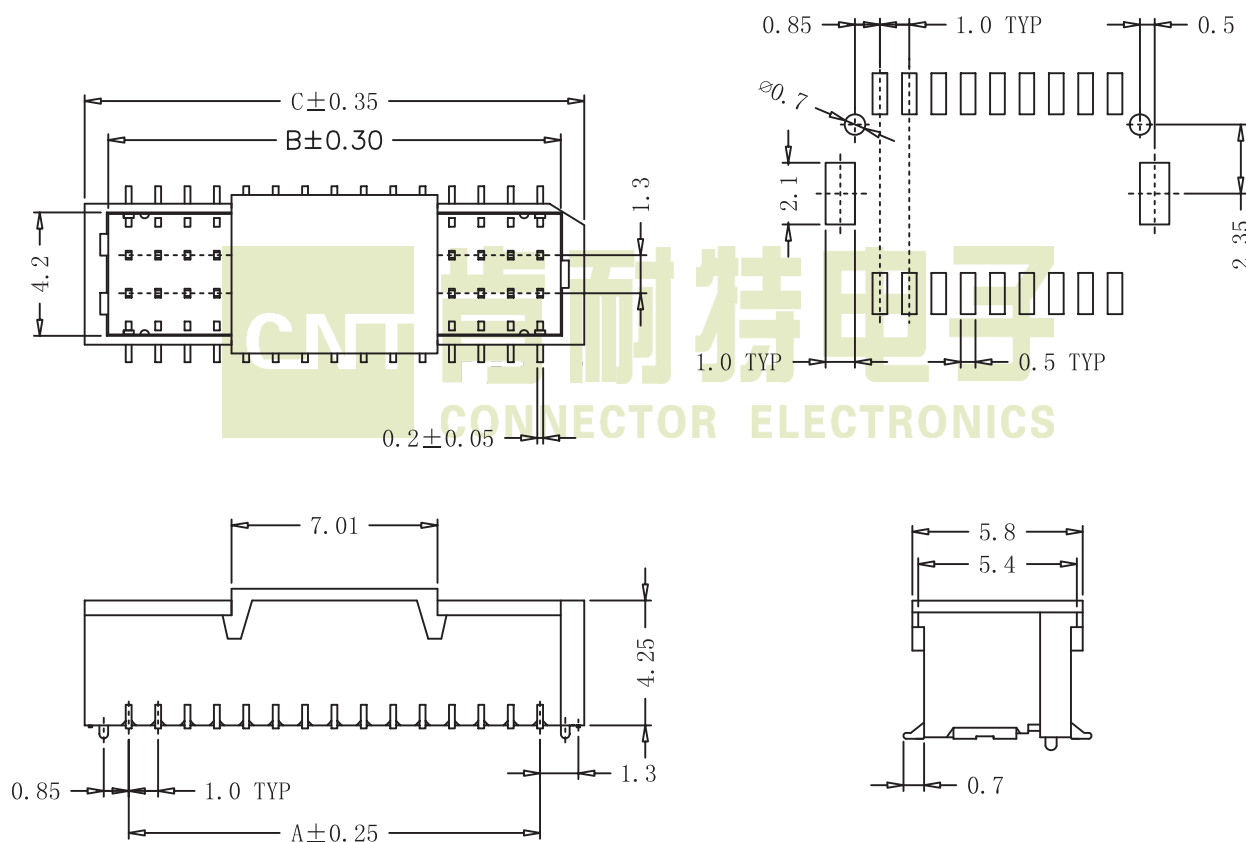

Poles	Part No.	Dimension (mm)	
		A	B
20	CNT-W100-2*10-GM	12.30	9.00
30	CNT-W100-2*15-GM	17.30	14.00
40	CNT-W100-2*20-GM	22.30	19.00
50	CNT-W100-2*25-GM	27.30	24.00