



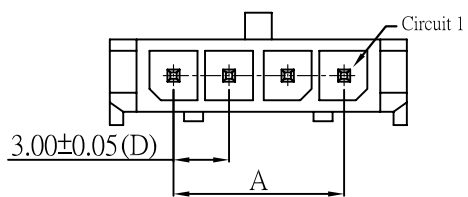


頁次1/2

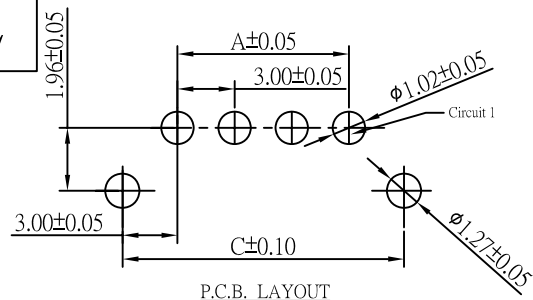

# ORDERING INFORMATION:

RoHS

KJ-3001WV(A)-1\* \*P

Part No

1:Single Row

Circuit No

WAFER(180°)

Part No:KJ-3001WV(A)-1

Material:Pin:Brass Tin-Plated

Base:Nylon66 UL94-V0,Black

Circuits:2-12

Contact Resistance:10mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:1500V AC/minute

Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Temperature Range:-25℃ ~+85℃

## Dimensions

| circuit | A     | B     | C     | circuit | A     | B     | C     |
|---------|-------|-------|-------|---------|-------|-------|-------|
| 1*1     | - -   | 6.65  | - -   | 1*7     | 18.00 | 24.65 | 24.00 |
| 1*2     | 3.00  | 9.65  | 9.00  | 1*8     | 21.00 | 27.65 | 27.00 |
| 1*3     | 6.00  | 12.65 | 12.00 | 1*9     | 24.00 | 30.65 | 30.00 |
| 1*4     | 9.00  | 15.65 | 15.00 | 1*10    | 27.00 | 33.65 | 33.00 |
| 1*5     | 12.00 | 18.65 | 18.00 | 1*11    | 30.00 | 36.65 | 36.00 |
| 1*6     | 15.00 | 21.65 | 21.00 | 1*12    | 33.00 | 39.65 | 39.00 |

C N T肯耐特电子有限公司

UNIT:MM

繪圖  
DRAWING:

李學庭

比例 (SCALE):

3:1

DESCRIPTION:

MX3.0 MICRO-FIT S/R DIP W180°

ANGLE  
±2°

DIM:  
.X±0.50  
.XX±0.25  
.XXX±0.10

審核  
CHECKED BY

溫衛民

名稱 (TITLE):

MX3.0 180°

PART NO:

KJ-3001WV(A)-1

REV:A1

核准  
APPROVAL BY

邱創明

存檔名稱 (FILE):

KJ-3001WV(A)-1

日期 (DATE):


2014/11/17

PROJECTION:




頁次2/2


RoHS




2P




3P




4P




9P




5P




6P




7P




8P



10P



11P



12P

C N T肯耐特电子有限公司

UNIT:MM

繪圖  
DRAWING:

李學庭

比例 (SCALE):

2:1

DESCRIPTION:

MX3.0 MICRO-FIT S/R DIP W180°

ANGLE  
±2°

DIM:  
.X±0.50  
.XX±0.25  
.XXX±0.10

審核  
CHECKED BY

溫衛民

名稱 (TITLE):

MX3.0 180°

存檔名稱 (FILE):

KJ-3001WV(A)-1

PART NO:

KJ-3001WV(A)-1

REV:A0

核准  
APPROVAL BY

邱創明

日期 (DATE):

2014/11/17

PROJECTION:

