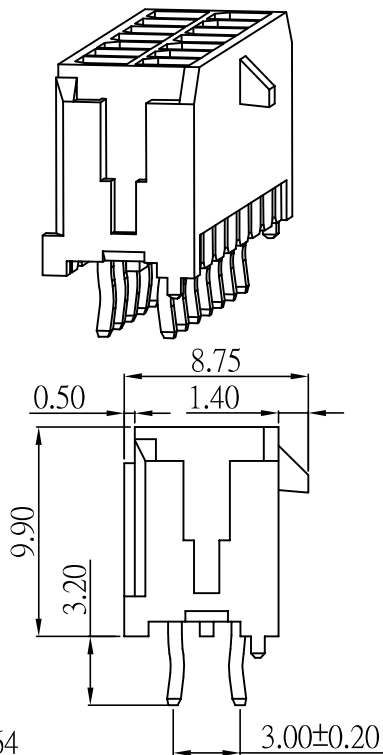
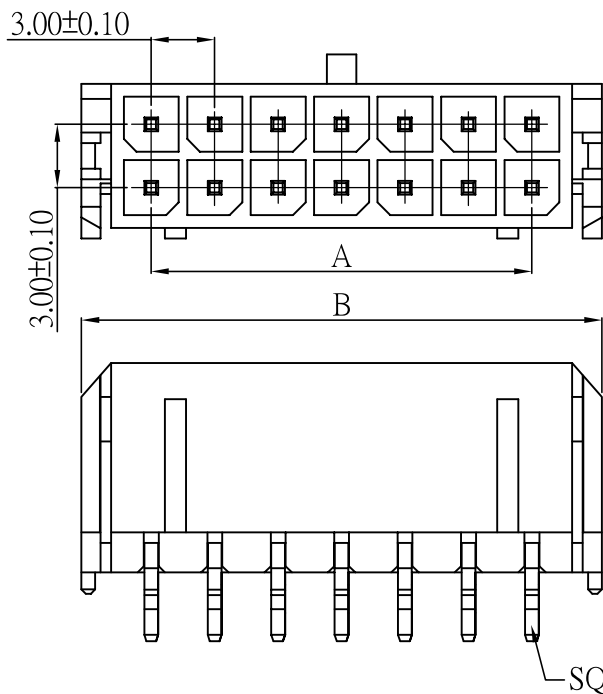
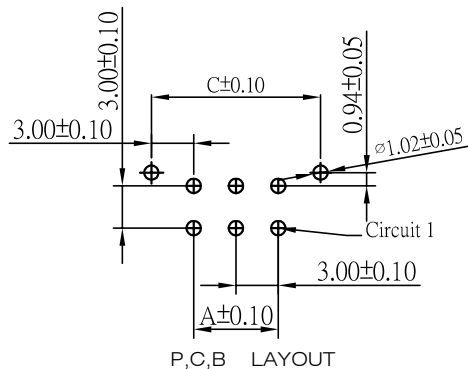


頁次1/2



ORDERING INFORMATION:

RoHS

KJ-3001WV(A)-2*P-*

Part No

2 : Double Row

Circuit No

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

WAFER(180°)

Part No:KJ-3001WV(A)-2

Material:Pin:Brass Tin-Plated

Base:PBT+30%G/F,UL94V-0

Circuits:2-24

Contact Resistance:10mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:1500V AC/minute

Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Temperature Range:-25℃~+85℃

Dimensions

circuit	A	B	C	circuit	A	B	C
2*1	-	6.65	6.00	2*7	18.00	24.65	24.00
2*2	3.00	9.65	9.00	2*8	21.00	27.65	27.00
2*3	6.00	12.65	12.00	2*9	24.00	30.65	30.00
2*4	9.00	15.65	15.00	2*10	27.00	33.65	33.00
2*5	12.00	18.65	18.00	2*11	30.00	36.65	36.00
2*6	15.00	21.65	21.00	2*12	33.00	39.65	39.00

CNT 肯耐特电子有限公司

UNIT:MM

繪圖
DRAWING:

黃玲麗

比例 (SCALE):

3:1

DESCRIPTION:

MX3.0 WAFER 180°

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

審核
CHECKED BY

核准
APPROVAL BY

名稱 (TITLE):

MX3.0 180°


存檔名稱 (FILE):







KJ-3001WV(A)-2

日期 (DATE):


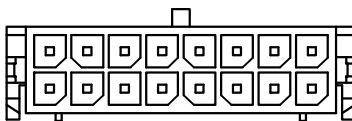
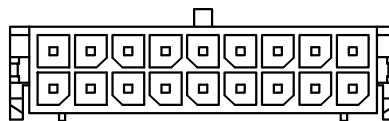
2011/05/24

PROJECTION:






 $2 \times 1P$  $2 \times 2P$  $2 \times 3P$  $2 \times 4P$  $2 \times 5P$ 

2x6P

 $2 \times 7P$  $2 \times 8P$ 

2x9P

 2×10^6  $2 \times 11P$  $2 \times 12P$

C N T肯耐特电子有限公司

DESCRIPTION:

MX3.0 WAFER 180°

PART NO:

KJ-3001WV(A)-2

UNIT:MM

ANGLE
 $\pm 2^\circ$

REV:A2

DIM:
.X $\pm$ 0.50
.XX $\pm$ 0.25
.XXX $\pm$ 0.10

繪圖
DRAWING:

审核
CHECKED BY

核准
APPROVAL BY

王三星

比例 (SCALE):

2:1

名稱 (TITLE):

MX3.0 180°

存檔名稱 (FILE):

KJ-3001WV(A)-2

日期 (DATE):

2008/01/21

