
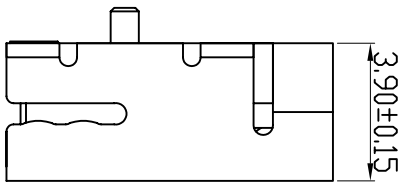
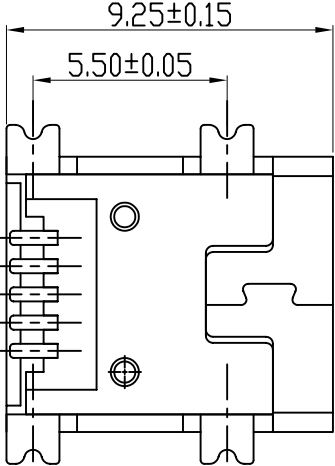
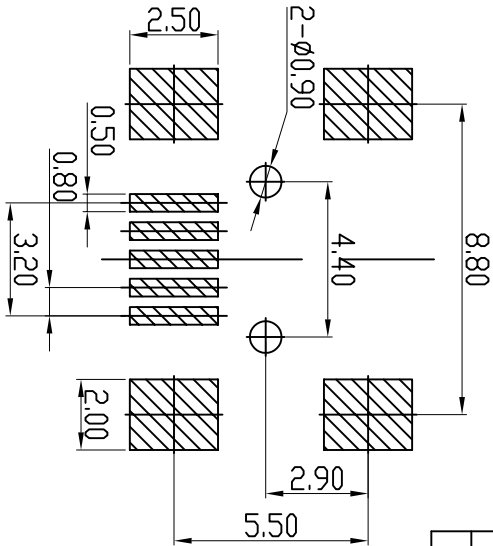


REV.	DESCRIPTION	DATE	DEVISER	APPROVED
A/0	The last word	06/03/02	W.X.Y	

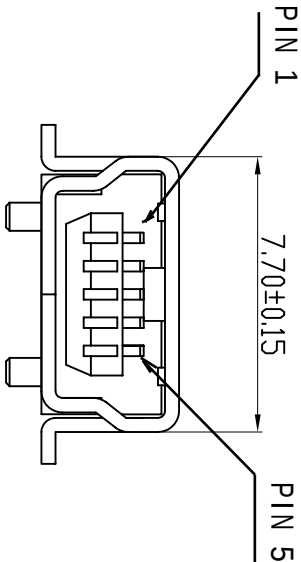

Specification

- 1.Voltage Current Rating:1AMP.30V AC
- 2.Insulation Resistance:100M Ω Min
- 3.Contact Resistance:50m Ω Max
- 4.Dielectric Withstanding Voltage:100V AC
- 5.Temperature Range:−20°C to +60°C

NOTE:

Tolerances unless otherwise specified:
0−10:±0.15; 10−20:±0.20; 20−30:±0.25

PART NO EXPLAIN:

MIN-B1M05F-D050

Shell Plate spec: T=Plateg tin, N=Plateg nickel
Housing Color: B=Black, N=Na ture, W=White
Contact Plate spec: (0=FU*, 1=3U*, 2=6U*, 3=15U*, 4=30U*)

3	Shell	C2680	1	T=0.40 Plateg nickel
2	Housing	L.C.P	1	UL94V-0 Nature/Black/White
1	Contact	C2680	5	T=0.25 Plateg Gold
NO.	VARIETY	MATERIAL	QT, Y	REMARK

C N T 肯耐特电子有限公司

UNIT:	mm	DEV/SER:	W.X.Y	TITLE: MINI USB 5P B TYPE(FEMALE) SMT		
3RD:		DESIGN:	W.X.Y	SHEET:	1	PART NO:
SCALE:	1:1	APPRD:		CHART NO:		MATE NO:
REV:	A/0	EXAMINE:				