
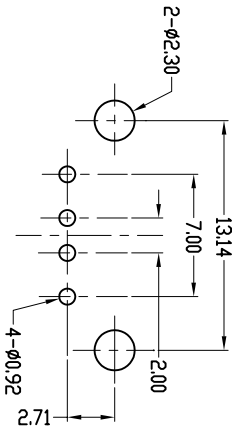

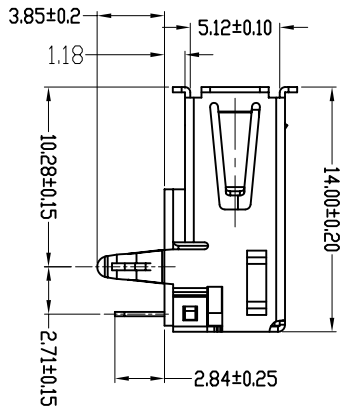
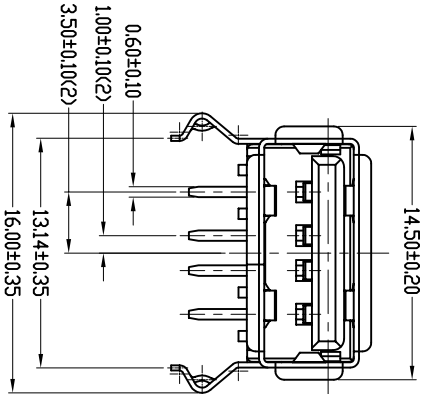


REV.	DESCRIPTION	DATE	DEVISER	APPROVED
A/0	The last word	07.03.06	W.X.Y	

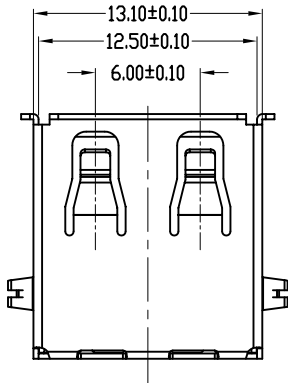

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.10)

Specification

- 1.Voltage Current Rating:1AMP,30V AC
 - 2.Insulation Resistance:100MΩ Min
 - 3.Contact Resistance:30mΩ Max
 - 4.Dielectric Withstanding Voltage:500V AC
 - 5.Temperature Range:-20°C to +60°C
- Remark:48Hours Guarantee by -30°C storage temperature
- 6.Insertion Force: 35 Newtons maximum
- 7.Extraction Force: 10 Newtons minimum

PART NO EXPLAIN:

USB-A1D122F-□□4□

- Shell Plate spec:
T=Plateg tin, N=Plateg nickel
- Housing Color:
B=Black, N=Nature, W=White
- Contact Plate spec:
(0=FU*, 1=3U*, 2=6U*, 3=15U*, 4=30U*)

3	Shell	C2680	1	T=0.30 Plateg nickel/Tin
2	Housing	P.B.T	1	UL94V-0 Nature/Black/White
1	Contact	C2680	4	T=0.25 Plateg Gold
NO.	VARIETY	MATERIAL	QTY	REMARK

C N T 肯耐特电子有限公司

UNIT:	mm	DEVISER:	W.X.Y	TITLE: USB A TYPE(FEMALE) DIP 90°				
3RD:		DESIGN:	W.X.Y					
SCALE:	1:1	APPRD:		SHEET:	1	PART NO:	USB-A1D122F-□□4□	
REV:	A/0	EXAMINE:		CHART NO:	1014-0122	MATE NO:		