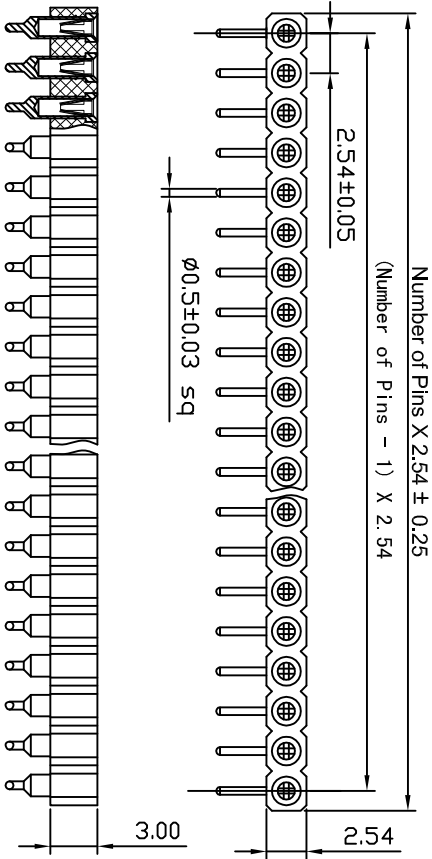


Technical Specs:

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-O
- Sleeve: Brass CuZn36Pb3 (C36000)
- Contact clip (4 finger): Beryllium copper (C17200)
- Mating pins: Outside Diameter 0.43 to 0.56 mm
- Forces: (polished steel gauge 0.51 mm)
- Insertion: 2 N typ.
- Withdrawal: 1 N typ.
- Mechanical life: min 500 cycles
- Rated current: 3 A
- Contact resistance: max 20 Milliohms
- Dielectric strength: min 1000 V RMS
- Coplanarity SMDterminations: max 0.1 mm
- (measured on 25 mm long connectors)

E			Units	mm	Scale	2:1	Drawing By	Date	C N T 肯耐特电子有限公司						
D			Tolerance Unless Otherwise Specified				Reviewed By	Date	Date	2004/07/12	Title	2.54mm SIP Socket H=3.00mm			
C										Sheet	1 of 1	Right Angle Type			
B			.X ~ ±0.30				Approval By Date			Thirt Angle Projection					
A			.XX ~ ±0.25 .XXX ~ ±0.20							Drawing No.				REV	
REV			ECN.NO.				Date	Angle	~ ± 3°				F/Name		A