

REV	DESCRIPTION	DATE

Specifications






Current Rating:0.8Amp
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:30mΩ Max.
Operating Temperature:−55°C to +125°C
Materials
Contact Material:Copper Alloy
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP
or the equivalent material
Colour:Black
All materials must meet Greenconn hazardous substances control standards

PIN NO.	A	B	C	D	E
2*06	6.35	10.77	13.20	9.37	8.37
2*13	15.24	19.66	22.09	18.26	17.26
2*25	30.48	34.90	37.33	33.50	32.50

Recommended P.C.Board

Layout

(Tolerance:±0.05)

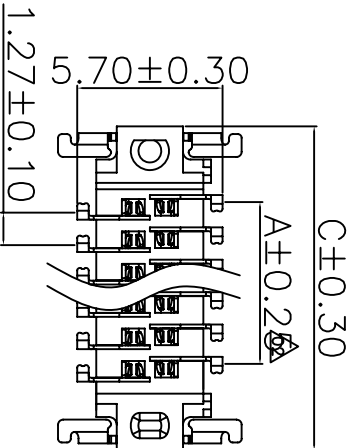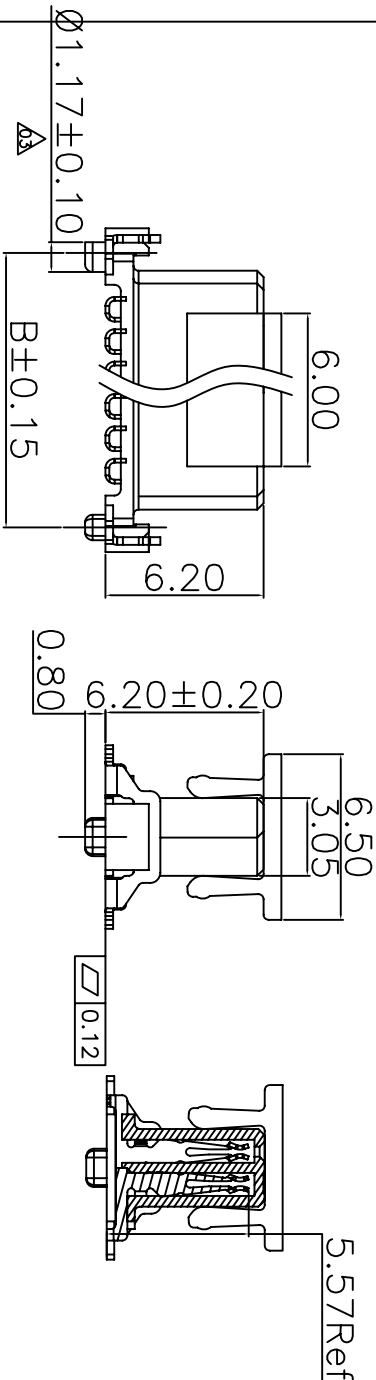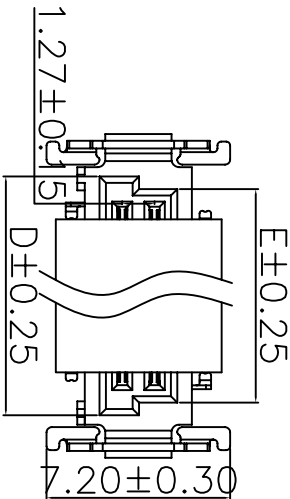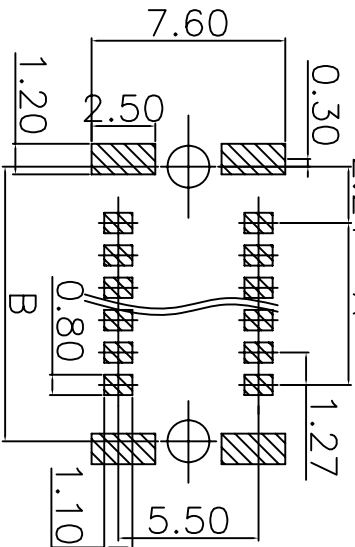

CNT
肯耐特电子有限公司

REV.	UNIT	SCALE
1.0	mm	1:1

GENERAL TOLERANCE		
X.°	±5°	.X° ±
X.	±5°	.X ±0.38
XX.	±5°	.XX ±0.25
XXX.	±5°	.XXX ±0.15

DRAWN	DATE
Alien	20170412
CHECK	DATE
APPROVE	DATE

DWG. NO.
PART. NO.
CNT-F127-2*xx-GM-620/5.7-TR

TITLE
Pitch1.27 Female Connector SMC Type-B SMT Type High 6.20mm 180°