

REV	DESCRIPTION	DATE





SPECIFICATIONS

Current Rating:2.0 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 500 V
Contact Resistance:20m Ω Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material :Brass
Insulator Material :NYLON 6T
Finish:Gold Plated
Resistance to
soldering heat:260° C+5° C
5+-0.5sec

Recommended P. C. Board
Hole Layout

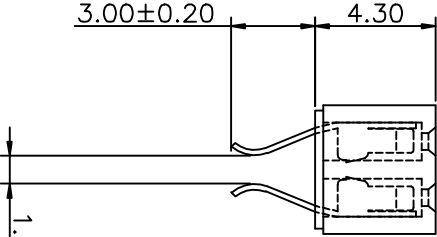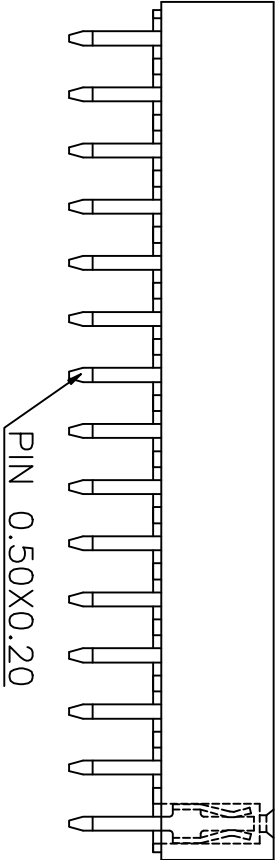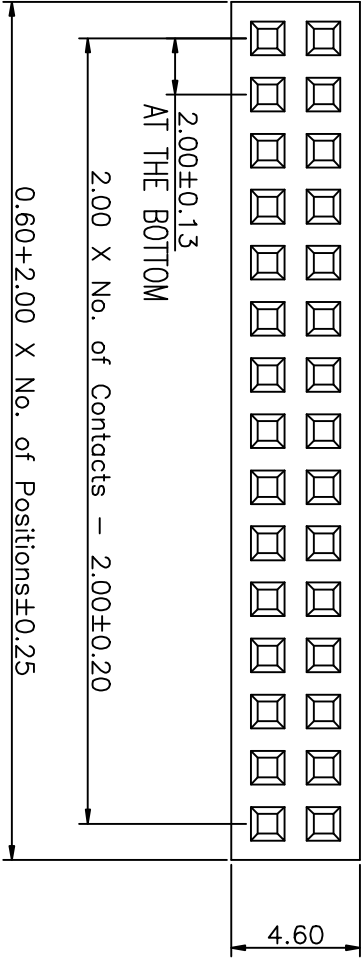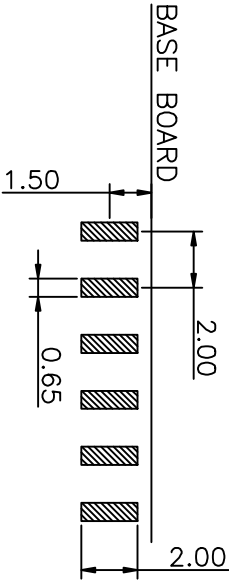

1.00±0.15 For 1.20mmT P.C.Board

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

A	E
B	F
H	W

C N T 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN Ares		DATE 20180609		DWG. NO.		TITLE 2.00mm Female Header Dual	
REV. A	UNIT mm	SCALE 1:1		I.°	±5°	I.	±0.38	CHECK	DATE	PART. NO.	CNT-F200-2*xx-GCS-430/3.0	Row	SMT Type
				.X°	±4°	.I	±0.25						
				.X°	±3°	.IX	±0.15						
				.XIX°	±2°	.IIX	±0.10						
				APPROVE		DATE							