
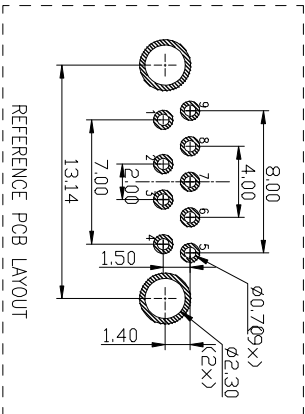
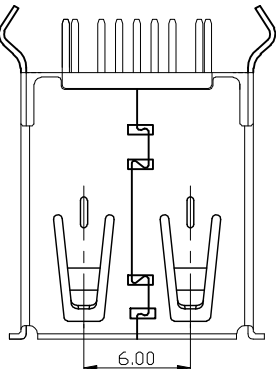
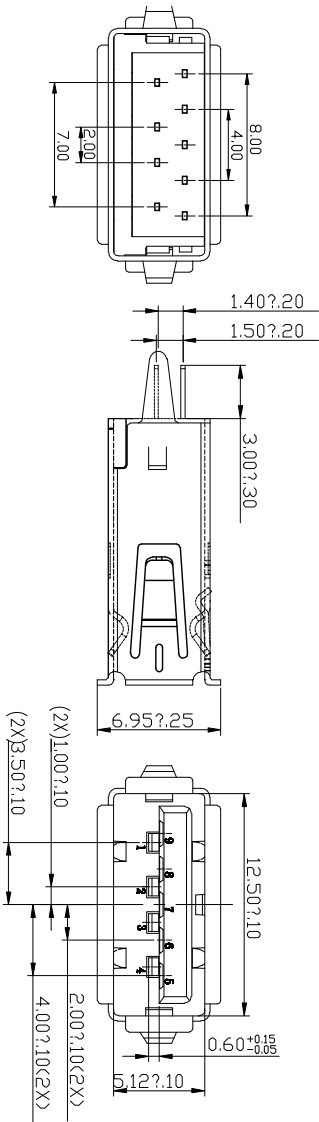
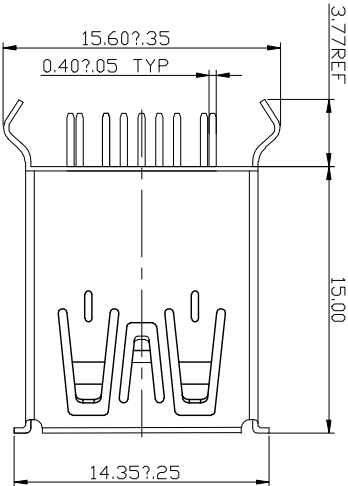




REV	DESCRIPTION	DATE

SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4,
0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V/(RMS)
Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons;Maximum
Unmating Force:10 Newtons;Minimum.
8N Min After Durability

MATERIAL:
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy (T=0.25mm)
Shell: Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated
operating Temperature:-55c+85c

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL XELFRANGE ±		DRAWN Arres	DATE 20180419	DWG.ND.		TITLE 1.27 Pin Header Single Row Right Angle Type	
REV.	UNIT	SCALE	X.	±	CHECK	DATE	PART.ND.			
1.0	mm	1:1	XX.	±	APPROVE	DATE	USB 3.0 AF straight DIP < 标准封装, 脚长3.0>			
			XXX.	±						