
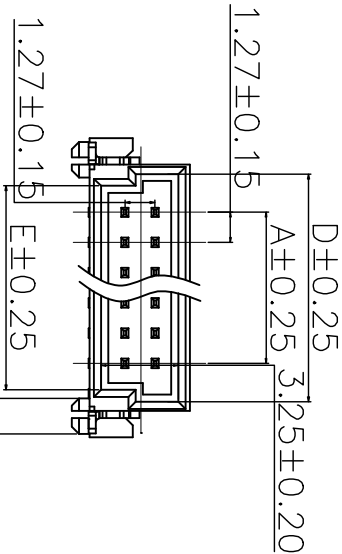

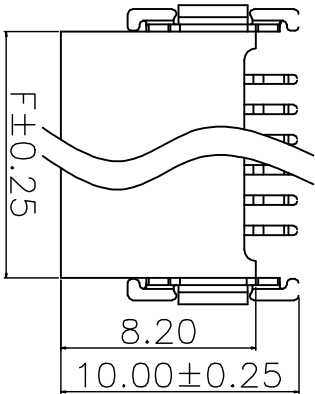


AT THE BOTTOM
ø1.50±0.03

Pin NO.	Dim.H
≤25pin	0.12
>25pin	0.15

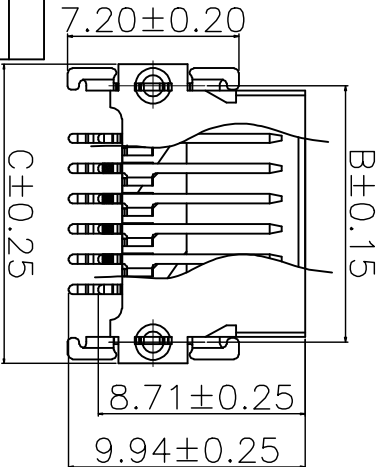


REV	DESCRIPTION	DATE

Specifications
Current Rating:0.8Amp
Insulation Resistance:1000M Min.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:30m Max.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:Copper Alloy
Insulator Material:High Temperature Thermoplastic,
UL 94V-0 LCP
or the equivalent material
Colour:Black
Plating:50U"Gold/60-180U"Matte Tin

PIN NO.	A	B	C	D	E	F	
2X05	5.08	9.50	11.40	8.30	7.30	9.08	
2X06	6.35	10.77	12.67	9.57	8.57	10.35	
2X08	8.89	13.31	15.21	12.11	11.11	12.89	無型部配方
	15.85	17.75	14.65	13.65	15.43		
	19.66	21.56	18.46	17.46	19.24		
	34.90	36.80	33.70	32.70	34.48		
	46.33	48.23	45.13	44.13	45.91		
	53.95	55.85	52.75	51.75	53.53		

Recommended P.C.Board Layout

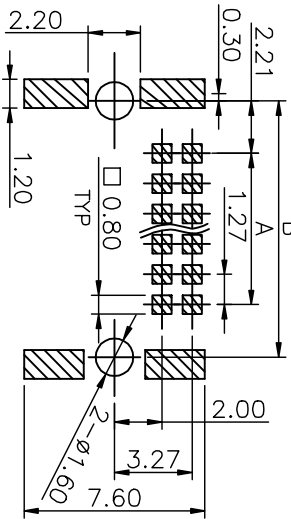

A	E
B	F
H	W

REV.	UNIT	SCALE
1.0	mm	1:1

CNT 肯耐特电子有限公司

GENERAL TOLERANCE			DRAWN		DATE
I.	±5°	.I	±	Ares	
II.	±5°	.II	±0.38	CHECK	DATE
III.	±5°	.III	±0.25	APPROVE	DATE
XXX	±5°	.XXX	±0.15		

DWG. NO.	PART. NO.
	CNT-B127-2*XX-HDM-10/1.23-TR

1.27*1.27 Box Header Of
Various Height Series
SMT Type