

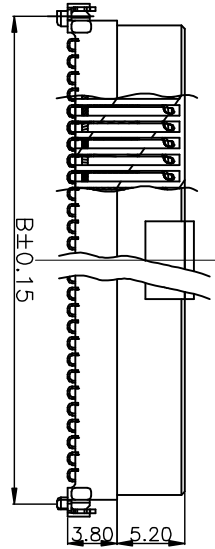
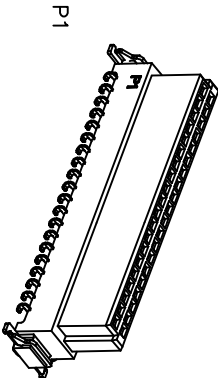







REV	DESCRIPTION	DATE

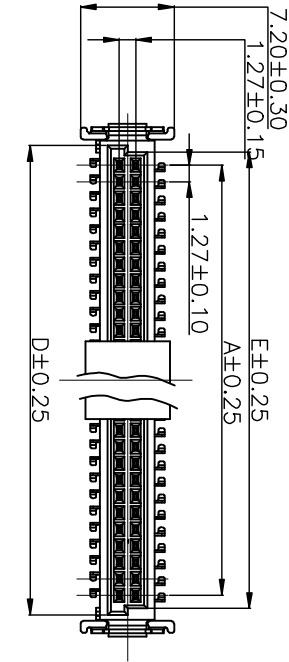

Pin No.	Dim.F
≤ 25pin	0.12
> 25pin	0.15

Specifications
Current Rating:0.8Amp
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:30mΩ Max.
Operating Temperature:−55℃ to +125℃
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
Colour:Black
Plating:50U"Gold/60-180U"Matte Tin
hazardous substances control standards.

PIN NO.	A	B	C	D	E
2*06	6.35	10.77	13.20	9.37	8.37
2*13	15.24	19.66	22.09	18.26	17.26
2*25	30.48	34.90	37.33	33.50	32.50
2*30	36.83	41.25	43.68	39.85	38.85
2*34	41.91	46.33	48.76	44.93	43.93
2*40	49.53	53.95	56.38	52.55	51.55

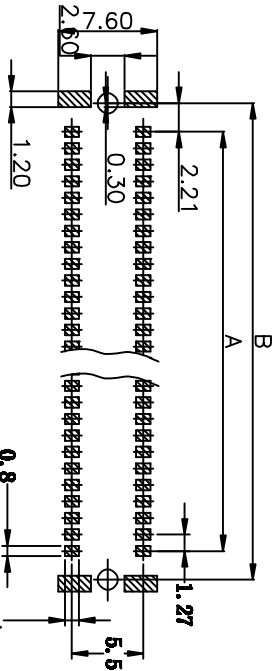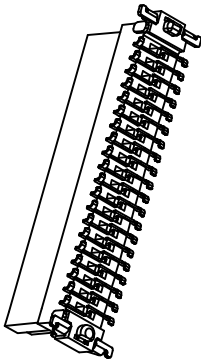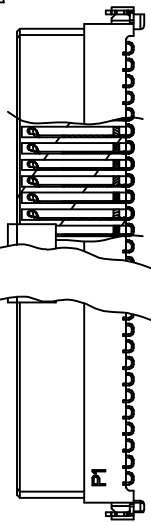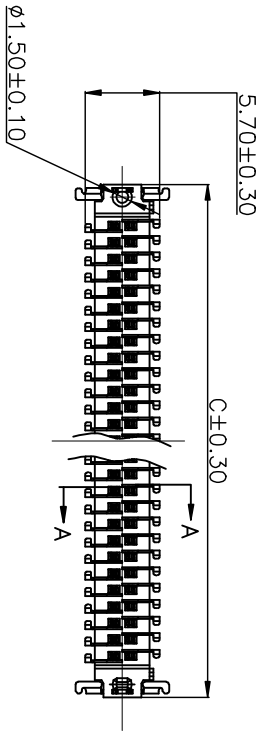

Recommended P.C.Board Layout
(Tolerance:±0.05)

A	E
B	F
H	W

GENERAL TOLERANCE				DRAWN		DATE	DWG. NO.		TITLE
I.° ±5°				Ares		20170117	1.27*1.27 Female Header Of Various Height Series SMT Type		
I. ±5°				CHECK		DATE	PART. NO.		
II. ±5°				APPROVE		DATE	CNT-F127-2*XX-HDM-9.0/5.7-TR		
III. ±5°									

REV. 1.0 UNIT SCALE 1:1

CNT 肯耐特电子有限公司