

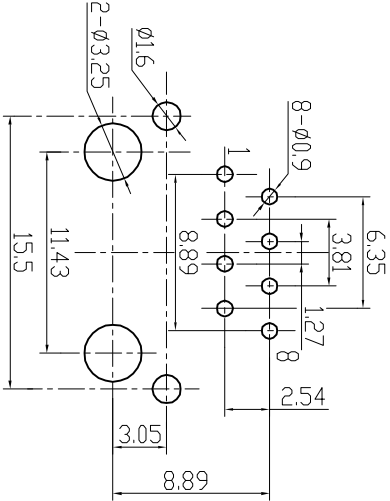
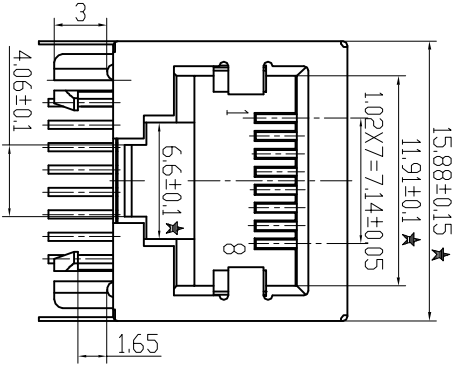


59-01-05

REV.	ECN ND.	DATE

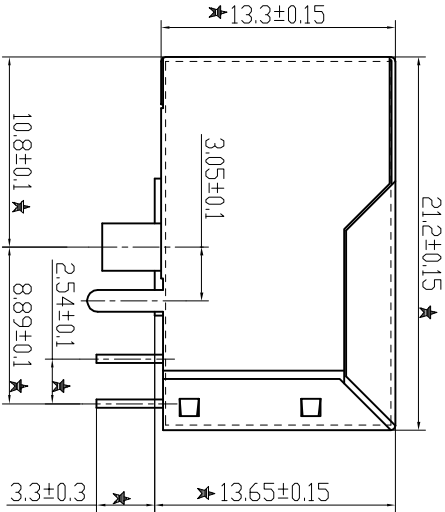

PCB LAYOUT

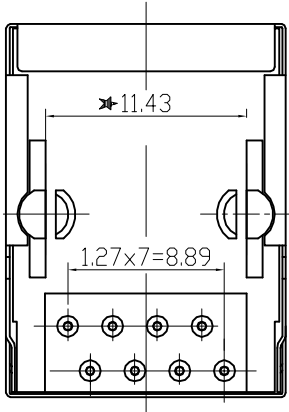

- NOTE:
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 15 AMP;
 - CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - MECHANICAL:
 - HOUSING: PBT, UL94V-0, BLACK;
 - INSERT: PBT, UL94V-0, BLACK;
 - TERMINALS: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au;
 - SHIELD: H65V
 - DURABILITY: 750 CYCLES Min.
 - Critical dimension.

RoHS Compliant

C N T 肯耐特电子有限公司

TOLERANCES

0~15±0.15,
15~30±0.2,
30~40±0.25
ANGLE±1°

MATERIAL: SEE NOTE

Designed:

NAME: 5921-S 8P8C 1PORT-05

FINISH: SEE NOTE

Checked:

DWG ND: C07082706



SIZE

SCALE

UNIT

CUSTOMER:

MODEL NO.:

SHEET 1

OF 1

Approved:

PART ND:

REV

00