
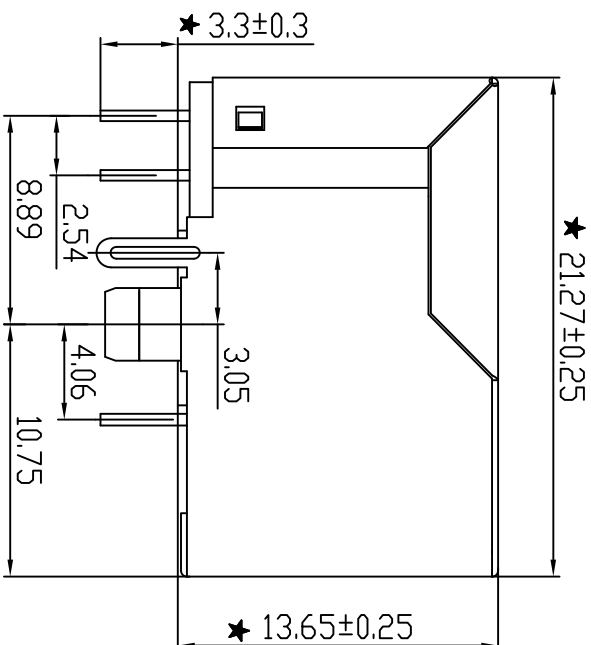
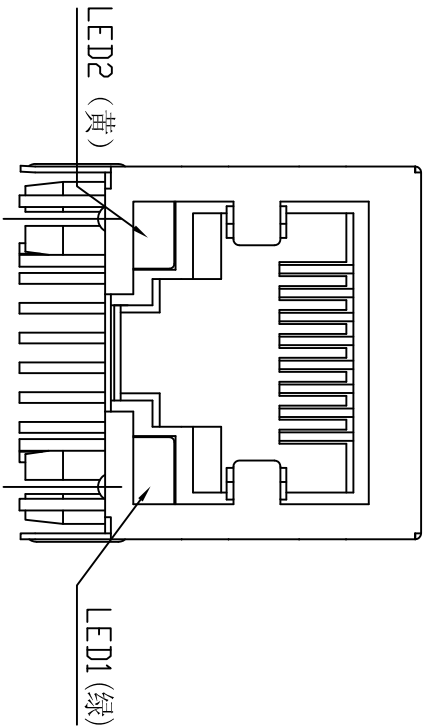
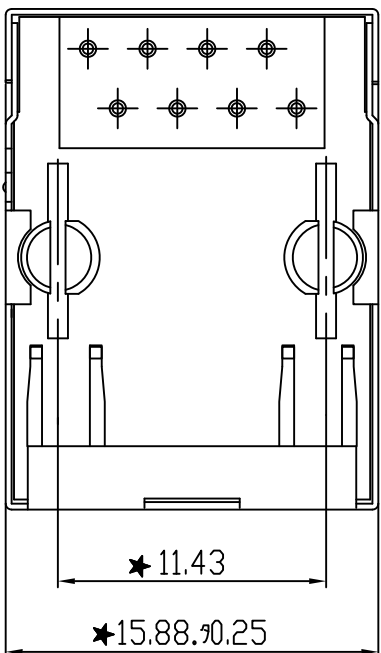


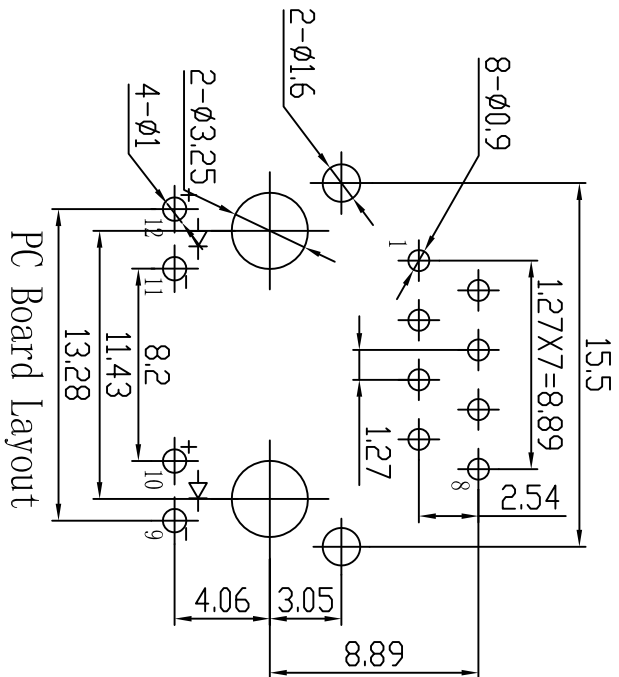

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, MIN.
- MECHANICAL:
- HOUSING & INSERT MATERIAL : PBT UL94V-0.
 - CONTACT MATERIAL : DIAPHRAGM 0.004MM PRESSURE BRONZE.
 - SHIELD : 0.020 ~ 0.25MM THICKNESS BRASS WITH NICKEL PLATED.
 - MATING/UNMATING FORCE : 2.2KG.F MAX.
 - RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
 - OPERATING LIFE : 600 CYCLES MIN.

- ENVIRONMENTAL:
- STORAGE : -10°C ~ +40°C RELATIVE HUMIDITY<70%.
 - OPERATION : -40°C ~ +70°C.

Remark:

1. Tolerances Unless Otherwise Specified
 .0±0.25 .00±0.20 .000±0.10

2. The mark with ★ is the key inspection dimension for QC

TEL	0512-55172933	C N T 肯耐特电子有限公司				
Fax						
Units	MM	Draw		Material		
Scale	1 : 1	Check		Name		
Rev'	A / 1	Approval		HOUSING	PBT	Part Number
View		Date	2010/05/04	PIN	Qsn6.5-0.1	File Name
						E:\