




REV	DESCRIPTION	DATE

SPECIFICATIONS

Current Rating:1.0 Amps
Insulator resistance:1000 Megohms Min.
Dielectric withstanding:AC 300 V
Contact Resistance:20 mΩ Max
Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
Insulator Material:Polyester UL 94V-0
LCP/Nylon 6T
Finish:Gold Plated

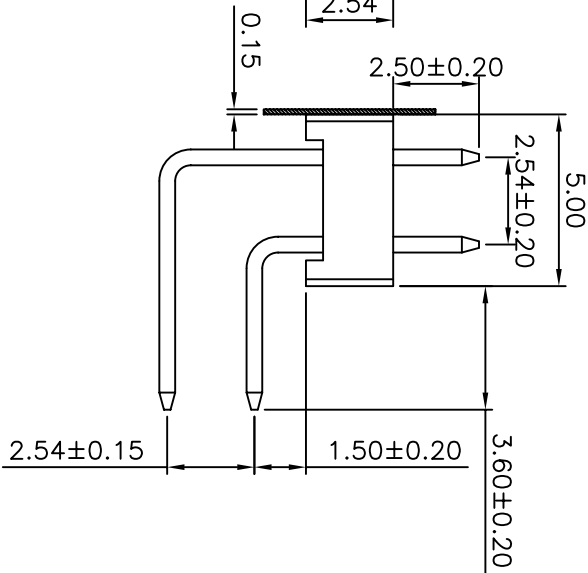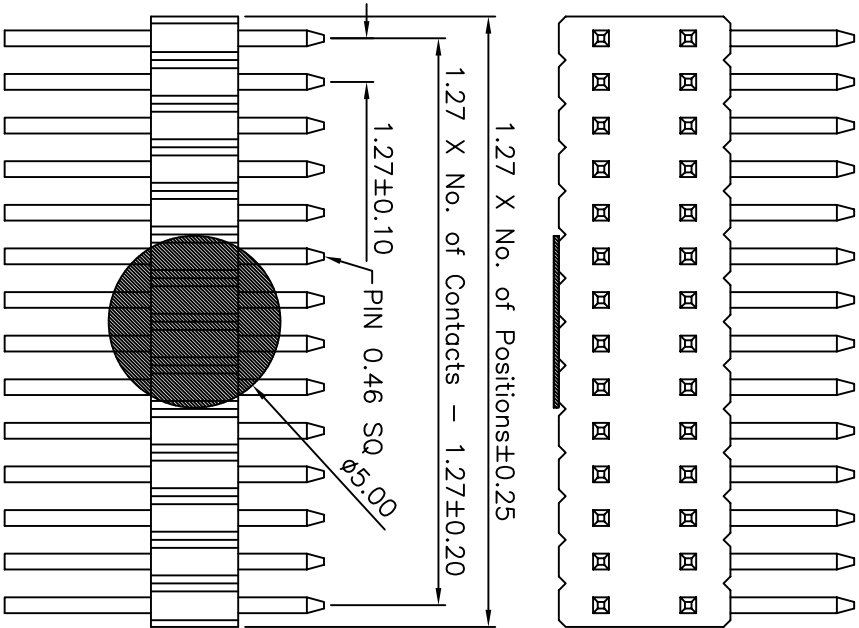

A			
B		F	
H		W	

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5°	X.° ±	Ares	20170830		1.27*2.54 PIN HEADER
			X. ±5°	X ±0.38	CHECK	DATE		DUAL ROWS (R/A) TYPE
			XX. ±5°	XX ±0.38	APPROVE	DATE		BASE 2.54H
			XXX. ±5°	XXX ±0.38				

PART. NO. CNT-M127*2.54-2*XX-GD-2.5/3.6/1.5-254