

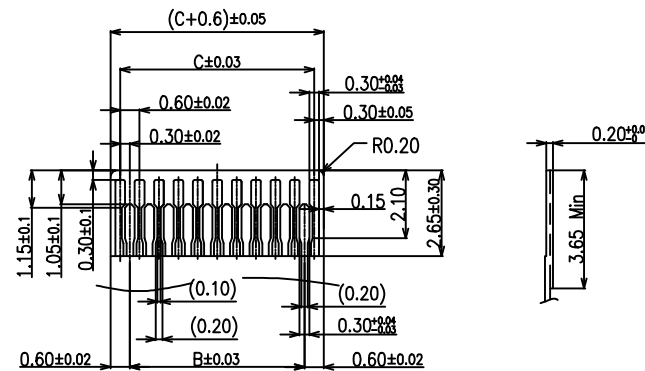
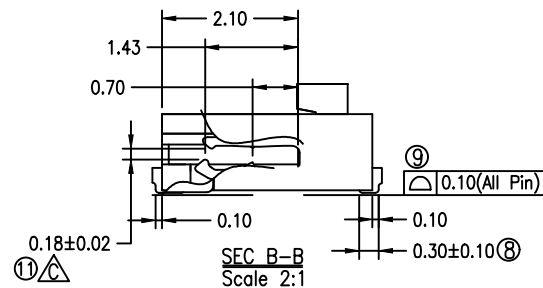

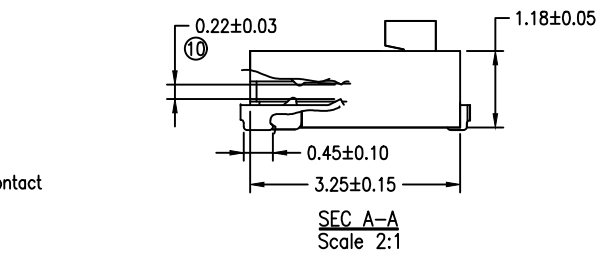


REV	DESCRIPTION	DATE

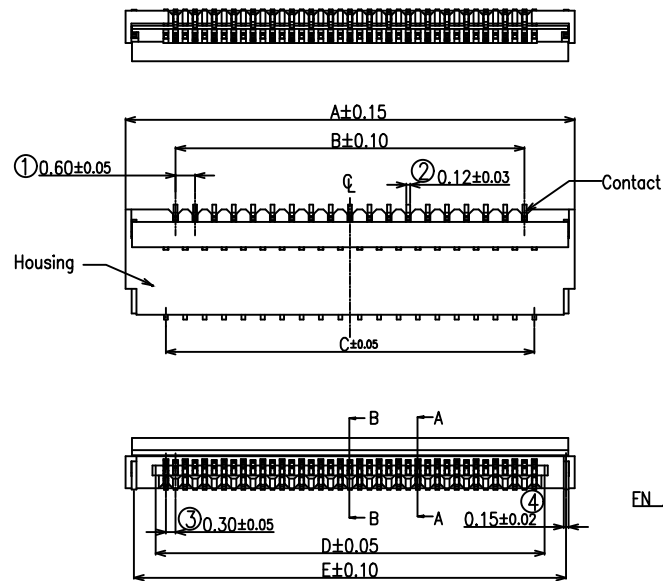

RECOMMENDED FPC/FFC

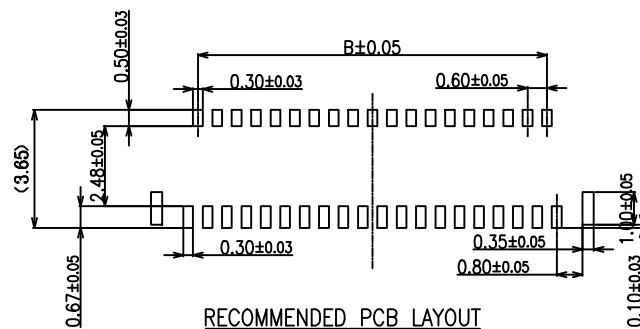

RECOMMENDED PCB LAYOUT

NOTE:


- MATERIAL AND FINISH
HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
CONTACT:COPPER ALLOY.
HOLDDOWN:COPPER ALLOY.
PLATING:TIN OR GOLD PLATED OVER NICKEL.
- ELECTRICAL
CURRENT:0.3A MAX.
VOLTAGE :30V MAX.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
CONTACT RESISTANCE:30mΩ MAX.
INSULATION RESISTANCE:50MΩ MIN.
- ENVIRONMENTAL
TEMPERATURE:-25°C TO +85°C
- WITH "A","B","C","D","E" "O" MAJOR DIMENSION FOR QC.
- PART NO.
CNT-FPC030-XX-GDM-D00-165

DIMENSIONAL INFORMATION

No. of Contacts	Dimension				
	A	B	C	D	E
13	6.10	3.00	3.60	4.23	5.57
15	6.70	3.60	4.20	4.83	6.17
17	7.30	4.20	4.80	5.43	6.77
19	7.90	4.80	5.40	6.03	7.37
21	8.50	5.40	6.00	6.63	7.97
23	9.10	6.00	6.60	7.23	8.57
25	9.70	6.60	7.20	7.83	9.17
27	10.30	7.20	7.80	8.43	9.77
29	10.90	7.80	8.40	9.03	10.37
31	11.50	8.40	9.00	9.63	10.97
33	12.10	9.00	9.60	10.23	11.57
35	12.70	9.60	10.20	10.83	12.17
37	13.30	10.20	10.80	11.43	12.77
39	13.90	10.80	11.40	12.03	13.37
41	14.50	11.40	12.00	12.63	13.97
45	15.70	12.60	13.20	13.83	15.17
49	16.90	13.80	14.40	15.03	16.37
51	17.50	14.40	15.00	15.63	16.97
57	19.30	16.20	16.80	17.43	18.77
61	20.50	17.40	18.00	18.63	19.97
67	22.30	19.20	19.80	20.43	21.77
71	23.50	20.40	21.00	21.63	22.97
73	24.10	21.00	21.60	22.23	23.57

CNT 肯耐特电子有限公司

REV. 1.0 UNIT mm SCALE 1:1



GENERAL TOLERANCE

X. ° ±5°	X. ±0.30
.X° ±3°	.X ±0.38
.XX° ±2°	.XX ±0.25
.XXX° ±1°	.XXX ±0.15

DRAWN

董道丽

DATE

20191011

CHECK

王芳芳

DATE

20191011

APPROVE

王元中

DATE

20191011

DWG. NO.

PART. NO.

CNT-FPC030-XX-GDM-D00-165

TITLE

FPC 0.3 PITCH 双面接触
前插后锁 平脚SMT90度