


REV	DESCRIPTION	DATE
1.0	Release	20221108

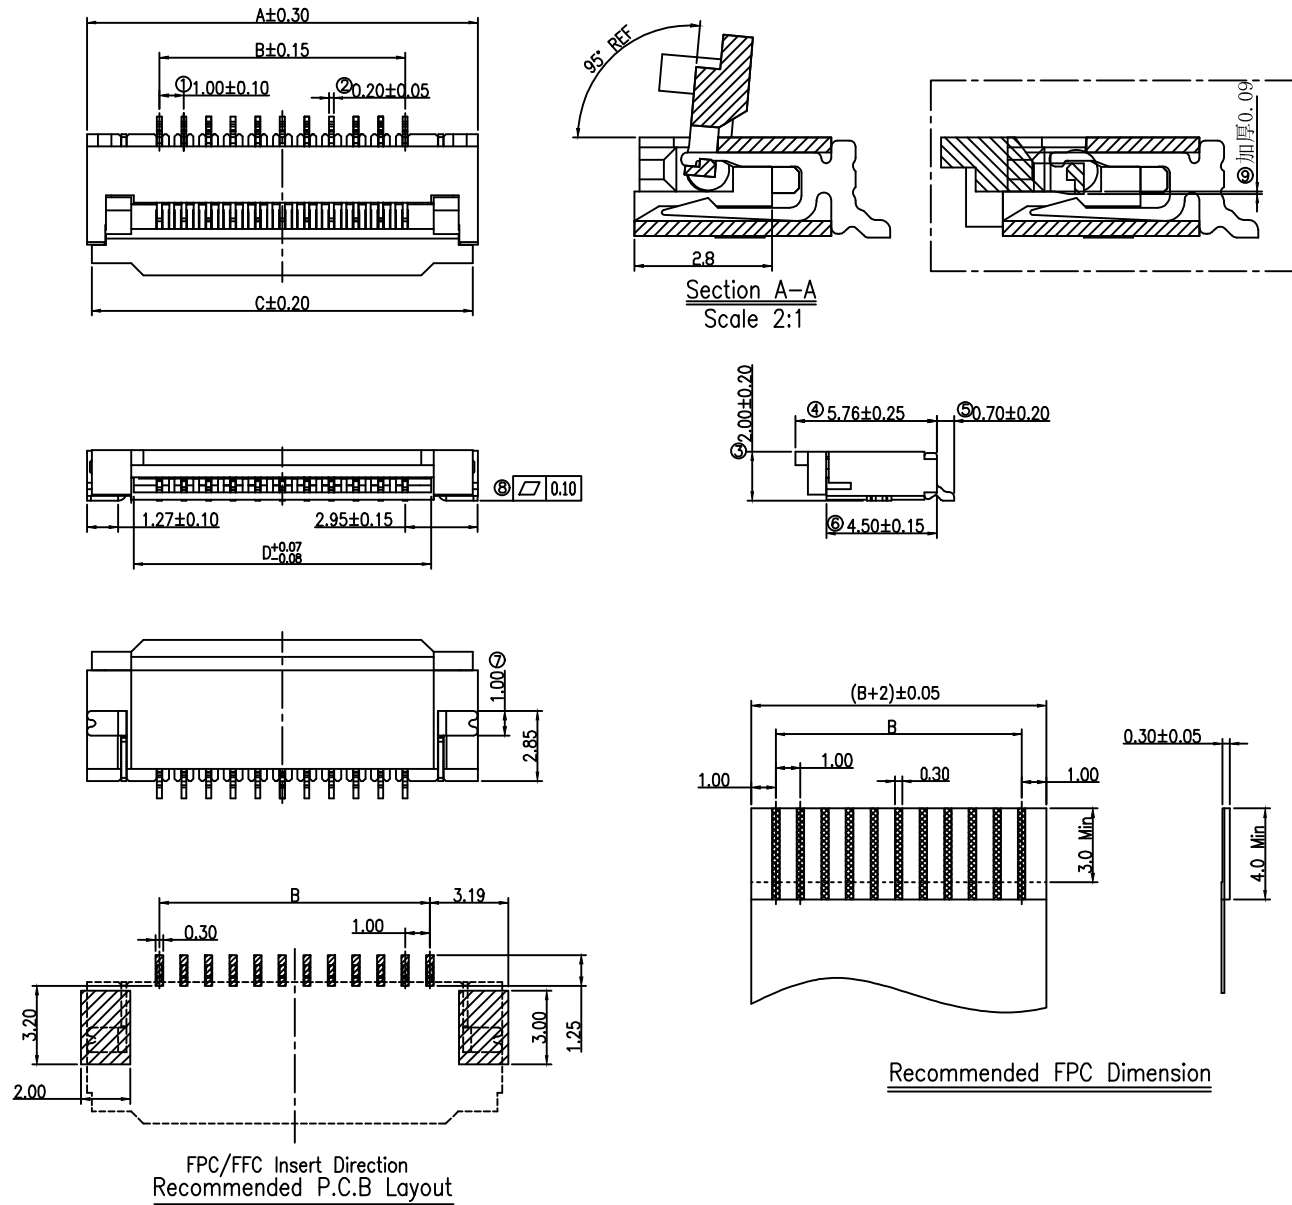

NOTE:

- MATERIAL  
HOUSING:LCP,HIGH-TEMP. THERMOPLASTIC. UL 94V-0.  
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.  
CONTACT:COPPER ALLOY. PLATING:PLATED TIN.  
HOLDDOWN:COPPER ALLOY. PLATING:PALTED TIN.
- ELECTRICAL  
CURRENT:0.5A MAX.  
DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.  
CONTACT RESISTANCE:20mΩ MAX.  
INSULATION RESISTANCE:50MΩ MIN.
- ENVIRONMENTAL  
TEMPERATURE:-25°C TO +85°C

■ DIMENSIONAL INFORMATION

PIN	Dimension				PIN	Dimension			
	A	B	C	D		A	B	C	D
04	8.90	3.00	8.50	5.10	19	23.90	18.00	23.50	20.10
05	9.90	4.00	9.50	6.10	20	24.90	19.00	24.50	21.10
06	10.90	5.00	10.50	7.10	21	25.90	20.00	25.50	22.10
07	11.90	6.00	11.50	8.10	22	26.90	21.00	26.50	23.10
08	12.90	7.00	12.50	9.10	23	27.90	22.00	27.50	24.10
09	13.90	8.00	13.50	10.10	24	28.90	23.00	28.50	25.10
10	14.90	9.00	14.50	11.10	25	29.90	24.00	29.50	26.10
11	15.90	10.00	15.50	12.10	26	30.90	25.00	30.50	27.10
12	16.90	11.00	16.50	13.10	27	31.90	26.00	31.50	28.10
13	17.90	12.00	17.50	14.10	28	32.90	27.00	32.50	29.10
14	18.90	13.00	18.50	15.10	29	33.90	28.00	33.50	30.10
15	19.90	14.00	19.50	16.10	30	34.90	29.00	34.50	31.10
16	20.90	15.00	20.50	17.10	31	35.90	30.00	35.50	32.10
17	21.90	16.00	21.50	18.10	32	36.90	31.00	36.50	33.10
18	22.90	17.00	22.50	19.10					

备注:10P和15P,加厚0.09

肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN		DATE		DWG. NO.		TITLE	
				X.° ±5°	X. ±0.30	董道丽		20221108		20221108006			
REV. 1.0    UNIT mm    SCALE 1:1				.X° ±3°		CHECK		DATE		PART. NO.		FPC 1.0 PITCH 单面下接触 掀盖式 平脚位 SMT90° H=2.0mm	
				.XX° ±2°		.XX ±0.15		顾海峰		20221108			
				.XXX° ±1°		APPROVE		DATE					
				.XXX ±0.10		王元中		20221108					